



Australian Rail Track Corporation

Cabramatta Loop Water Quality Monitoring Report

September 2020

Limitations

This Report has been prepared by GHD for *ARTC* and may only be used and relied on by *ARTC* for the purpose agreed between GHD and *ARTC* as set out in this Report.

The services undertaken by GHD in connection with preparing this Report were limited to those specifically detailed in Sections 1, 2 and 3 of this Report. GHD otherwise disclaims responsibility to any person other than *ARTC* arising in connection with this Report. GHD also excludes implied warranties and conditions, to the extent legally permissible.

The services undertaken by GHD in connection with preparing this Report were limited to those specifically detailed in the report and are subject to the scope limitations set out in the report.

The opinions, conclusions and any recommendations in this Report are based on conditions encountered and information reviewed at the date of preparation of the Report.

GHD has no responsibility or obligation to update this Report to account for events or changes occurring subsequent to the date that the Report was prepared.

Assumptions

The opinions, conclusions and any recommendations in this Report are based on assumptions made by GHD when undertaking services and preparing the Report (“Assumptions”), including (but not limited to):

- All data supplied by *ARTC* has been correctly entered into the Excel Spread Sheet provided.
- Investigations undertaken in respect of this Report were strictly limited to the agreed objectives and scope of monitoring; and were constrained by the particular site conditions, such as the quality of aquatic habitat at the monitored locations and the quality of vegetation. As a result, not all site features and conditions may have been identified in this Report.
- Site conditions (including the presence of hazardous substances and/or site contamination) may change after the date of this Report.
- Other information provided is accurate, in so far as they apply to this analysis.
- Additional information that could add further value to the interpretations in this Report may be available from other sources, and may be provided at a later stage.

The opinions, conclusions and any recommendations in this Report are based on information obtained from specific sample points. Site conditions at other parts of the site may be different from the site conditions found at the specific sample points.

GHD expressly disclaims responsibility for any error in, or omission from, this Report arising from or in connection with any of the Assumptions being incorrect.

GHD does not accept responsibility arising from, or in connection with, any change to the site conditions. GHD is also not responsible for updating this Report, if the site conditions change.

GHD has prepared this Report on the basis of information provided by *ARTC* and others who provided information to GHD (including Government authorities), which GHD has not independently verified or checked beyond the agreed scope of work.

GHD does not accept liability in connection with such unverified information, including errors and omissions in the Report, which were caused by errors, or omissions in that information.

Executive summary

Background

Australian Rail Track Corporation (ARTC) proposes to construct and operate a passing loop for up to 1,300 metre length trains on the Southern Sydney Freight Line (SSFL) between Sydney Trains' Cabramatta and Warwick Farm stations. The Cabramatta Loop Project ('the project') would allow freight trains to pass and provide additional rail freight capacity along the SSFL.

The project is State significant infrastructure in accordance with Division 5.2 of the NSW Environmental Planning and Assessment Act 1979 (EP&A Act). As Critical State significant infrastructure, the project needs approval from the NSW Minister for Planning and Public Spaces.

Surface water quality monitoring

This surface water quality monitoring report has been prepared to establish baseline water quality conditions for the project. The purpose of this work is to enable the achievement of Level 2 of the credit Env-1 'Receiving Water Quality' from the Infrastructure Sustainability Rating Scheme v 2.0 for which the project is targeting a Bronze rating.

The monitoring program was undertaken monthly between May 2019 and April 2020, incorporating twelve months of data for the program. One wet weather sampling event on 7 February 2020 was undertaken, following rainfall at Station 66137 of 48.2 millimetres in the preceding 24 hours.

The scope of the program is as follows:

- Sampling of surface water both upstream and downstream from the proposed project alignment and at the Cabramatta Creek's confluence with the Georges River, at suitable locations for monitoring considering access and landowner requirements.
- Monthly frequency of monitoring, as well as during wet weather events.
- Measurement parameters include the following:
 - In situ physico-chemical indicators (temperature, pH, conductivity and turbidity).
 - Total Suspended Solids (sediment runoff indicator).
 - Nutrients - NH₃, NO₂, NO₃, TN, TP, SRP (indicators of runoff).
 - Oil and grease.
 - Heavy metals: Arsenic (As), Cadmium (Cd), Chromium (Cr), Copper (Cu), Lead (Pb), Mercury (Hg), Nickel (Ni) and Zinc (Zn).
 - Major urban pollutants: including ultra-trace Polychlorinated Biphenyls (PCBs); organochlorine (OC) and organo-phosphorus (OP) pesticides; fumigants; halogenated aliphatic and aromatic compounds; BTEXN (Benzene, Toluene, Ethylbenzene, Xylene, Naphthalene); phenols and poly-aromatic hydrocarbons (PAHs). These pollutants are associated with to run-off from construction activities in relation to roads and certain landscapes.

The selection of sampling points for surface water monitoring considered sites that have permanent water; are located upstream and downstream of the most likely impact area, and where access is practical and permitted. Three sites were identified on Cabramatta Creek in the study area. Generally the sites yielded representative water samples.

This report

This report describes the methods used, a synthesis of results and relevant discussions on the surface water monitoring of the selected sites for the twelve months that sampling was undertaken to inform this report (ie May 2019 to April 2020). This sampling has occurred in the initial 'pre-construction' phase, and will be used to form the baseline dataset that is to be compared against water quality results from subsequent sampling. This report also articulates how the water quality monitoring contributes to the Infrastructure Sustainability v 2.0 Rating credit Env-1.

Summary of surface water quality

The ANZECC (2000) Guidelines for ecosystem protection in 'moderately-disturbed' freshwater ecosystems are considered the most appropriate trigger values for use in the surface water quality assessment of the project area.

The amount of rainfall for the reported period of monitoring (May 2019 to April 2020) was similar to the long term average for the area, however the distribution of rainfall was different. Rainfall was extremely light throughout most of the reporting period, which resulted in prolonged dry conditions, with the exception of a single wet weather event in February 2020. Eight of the twelve months in the period were drier than the corresponding long-term median. Most of the rainfall recorded fell during the February 2020 event; 328 millimetres fell between 7 and 10 February, and 200 millimetres was recorded on 10 February alone.

The twelve months of monitoring results are a component of establishing baseline conditions of the waterbodies and waterways in the construction project area. The data obtained indicate that various urban pollutants affect the water quality of the selected sites, most of which are poor in water quality. It is recommended that pre-construction monitoring continues until construction activities begin. At this point, the pre-construction monitoring dataset will be analysed to form the 'baseline dataset' for the project, allowing comparison with subsequent monitoring performed during construction.

Two notable characteristics of all of the sites are elevated enterococci levels, and nutrient enrichment, which are both closely related to land use. Elevated enterococci levels are indicative of likely sewage overflows within the catchment draining to the creek. These were noted to greatly increase during sampling of the wet weather event on 7 February 2020. The enterococci levels found during dry weather sampling are infrequently above the recreational guideline value for secondary contact.

Nutrient enrichment of both standing pools and flowing waterways is common, indicated particularly by highly elevated concentrations of TP, TN, NO_x and ammonia. Runoff of these nutrients can be expected from landscaped parks and recreational areas along with golf courses that may use nutrient rich fertilisers for lawns in these areas.

Some metals were detected infrequently at most sites, with only copper and zinc being more frequently recorded at concentrations greater than ANZECC ecosystem protection guidelines.

Hydrocarbons were not detected at the surface water sites. Of the other monitored potential pollutants, including OC/OP pesticides, PAHs, and phenolic substances, the analyses were negative for all samples, including dry and wet weather monitoring.

Water quality monitoring was performed after a single rain event, following heavy rainfall on 7 February 2020. The results of the wet weather monitoring included:

- Decreased EC at the sites.
- Markedly increased turbidity and TSS for the wet weather event at the sites.

- Increased enterococci concentrations at most sites, this can be attributed to stormwater inflows mobilising and transporting faecal material to the waterway.
- For nutrients, wet weather ammonia concentrations were similar to dry weather median data, whilst for other nutrients the wet weather concentrations were similar to dry weather maxima.
- Of the monitored metals, cadmium, nickel and mercury were not detected in wet weather samples. The other metals were similar to dry weather concentrations.
- The other tested contaminants (pesticides and hydrocarbons) were not detected in dry or wet weather sampling.

These results are as expected in wet weather flows through areas where urbanisation through the catchment has occurred, as it has in much of the Cabramatta Creek catchment.

Recommendations

It is recommended that the results collected and presented in this report are used for comparison to any subsequent sampling collected during future stages of the project. Implementation of the monitoring program has enabled the collection of surface water quality data of the selected sites. Sampling was performed mostly under dry weather conditions, as well as the monitored rain event. The baseline dataset from this monitoring can be expanded if desired by ARTC and as agreed by ARTC and their construction contractor.

It is recommended that if sampling sites need to be moved, that this can occur in advance of access becoming restricted, and that it is to be described and considered in any subsequent reporting. Restricted access may occur as future construction progresses (namely around the sampling location downstream of the project site).

It is recommended that if potential water quality effects on the sites from nearby construction become known, that these are described and considered in subsequent reporting.

Table of contents

1.	Introduction	1
1.1	Background	1
1.2	Objectives and scope	3
1.3	IS v 2.0 Compliance	3
2.	Methodology	4
2.1	Routine sampling	5
2.2	Rain event sampling	5
2.3	Surface water monitoring sites	5
2.4	Surface water monitoring	8
2.5	Data management	8
2.6	Water quality and aquatic ecosystem guidelines	9
2.7	Data analyses and presentation	11
3.	Results	12
3.1	Rainfall	12
3.2	Surface water monitoring results	14
3.3	Metals	29
3.4	Other urban pollutants	31
3.5	Wet weather event monitoring	32
3.6	Summary of surface water quality sites	32
3.7	Long term data comparison	34
4.	Discussion and recommendations	36
4.1	General observations	36
4.2	Summary and recommendations	37
5.	References	38

Table index

Table 1.1	IS v 2.0 compliance with Env-1	4
Table 2.1	Surface water monitoring locations	6
Table 2.2	ANZECC (2000) Guidelines for aquatic ecosystems	10
Table 2.3	ANZECC (2000) guidelines for metals in aquatic ecosystems	11
Table 3.1	Summary of rainfall (mm) at Bankstown Airport station 066137	13
Table 3.2	Variation of pH (units) across sites	14
Table 3.3	Variation of EC ($\mu\text{S}/\text{cm}$) concentrations across sites	16
Table 3.4	Variation of Turbidity (NTU) across sites	17
Table 3.5	Variation of total suspended solids (mg/L) across sites*	18

Table 3.6	Variation of Enterococci (CFU/100 mL) across sites.....	21
Table 3.7	Variation of <i>E. coli</i> (CFU/100 mL) across sites.....	22
Table 3.8	Variation of ammonia (mg/L) concentrations across sites.....	24
Table 3.9	Variation of NOx (mg/L) concentrations across sites	25
Table 3.10	Variation of TN (mg/L) concentrations across sites.....	26
Table 3.11	Variation of SRP (mg/L) concentrations across sites*.....	28
Table 3.12	Variation of TP (mg/L) concentrations across sites	29
Table 3.13	Metals exceedances, all sites, May 2019 to April 2020.....	30
Table 3.14	Summary of water quality data (May 2019 – April 2020) – exceedance of default ANZECC guideline values (% of samples).....	33
Table 3.15	GRCCC Cabramatta Creek Upper – data summary	34
Table 3.16	GRCCC Cabramatta Creek Lower – data summary	35

Figure index

Figure 1.1	Location of the project	2
Figure 2.1	Map of existing surface water monitoring sites.....	7
Figure 3.1	Daily rainfall at Bankstown Airport, May 2019 to April 2020.....	13
Figure 3.2	Variation of pH across the monitored sites	15
Figure 3.3	Variation of EC ($\mu\text{S}/\text{cm}$) across the monitored sites.....	16
Figure 3.4	Variation of Turbidity (NTU) across the monitored sites.....	17
Figure 3.5	Variation of TSS (mg/L) across sites	19
Figure 3.6	Comparison of turbidity and TSS monitoring data.....	20
Figure 3.7	Variation of enterococci (CFU/100 mL) across sites	21
Figure 3.8	Variation of <i>E. coli</i> (CFU/100 mL) across sites.....	22
Figure 3.9	Variation of ammonia (mg/L) across sites	24
Figure 3.10	Variation of NOx (mg/L) across the monitored sites.....	26
Figure 3.11	Variation of TN (mg/L) across the monitored sites	27
Figure 3.12	Variation of SRP (mg/L) across the monitored sites.....	28
Figure 3.13	Variation of TP (mg/L) across the monitored sites	29

1. Introduction

In April 2019, GHD Pty Ltd (GHD) was contracted by Australia Rail Track Corporation (ARTC) to provide consultant services to undertake the Surface Water Monitoring Program for the Cabramatta Rail Loop Project (Contract No NSW-TC-05541-00, variation order V10).

This Water Quality Monitoring report is based on data acquired over a twelve month period obtained pre-construction. It provides details of the monitoring sites, sampling methodology and results of the surface water samples collected between May 2019 and April 2020, incorporating twelve months of data for the program. This report also articulates how the water quality monitoring contributes to the IS v 2.0 Rating credit Env-1 and also responds to mitigation measure C6.6 from the EIS.

1.1 Background

ARTC has proposed to build a rail passing loop, adjacent to the existing Southern Sydney Freight Line (SSFL), between the Hume Highway and Cabramatta Road East road overbridges in the suburbs of Warwick Farm and Cabramatta. The construction of the new rail passing loop, with capacity for up to 1,300 metre length trains, will allow freight trains to pass and provide additional rail freight capacity along the SSFL. The planned extent of the construction and operational works are shown in Figure 1.1.

The existing water quality of the waterways in the project area has been described in Technical Report 7 – Surface Water and Groundwater Quality Impact Assessment. In brief, the water quality of Cabramatta Creek was the poorest in the Georges River system (Cabramatta Creek is a tributary of the Georges River) as noted in the *Cabramatta Creek Floodplain Management Study and Plan* (Bewsher, 2004), and representative of a catchment impacted by urbanisation and sewage overflows during wet weather events. The *2016-2017 River Health Report Card for the Georges River* (Georges River Combined Councils' Committee (GRCCC), 2018) identified that in recent years the overall water quality health of the Lower Cabramatta Creek to be “good”. This is due in part to efforts of local Councils and others to improve the water quality in the Cabramatta Creek catchment.

Identified by the monitoring undertaken to inform this report, the main waterway of Cabramatta Creek has tidal influence including to the sampling point identified as ‘upstream’ (upstream of the project site), high enterococci concentrations, and elevated nutrients. A range of potential impacts, common on rail projects and linear infrastructure projects alike, are described, along with standard measures to mitigate the impacts. Potential impacts during construction as well as operation are summarised as follows:

- Erosion of soils and sedimentation of waterways
- Reduced water quality from elevated turbidity, increased nutrients and other contaminants
- Smothering of aquatic organisms from increased sediments and associated low dissolved oxygen levels
- Potential growth of weeds and algal blooms associated with reduced water quality
- Accidental leaks or spills of chemicals and fuels
- Changes to flow rates, volumes and flow paths within waterways and drainage lines
- Temporary watercourse crossings and construction of bridges altering flow and water quality.



Figure 1.1 Location of the project

This Report aims to document the results of surface water quality monitoring undertaken to understand the 'baseline' conditions of the Cabramatta Creek waterway areas likely to be impacted by activities during the construction of the Cabramatta Rail Loop.

1.2 Objectives and scope

ARTC requires a surface water quality monitoring program for the described construction works, so as to supplement existing data, and to establish baseline surface water conditions. This requirement contributes to the IS v 2.0 Rating credit Env-1 and also responds to mitigation measure C6.6 from the EIS. The scope of the program has been developed to address the criteria detailed above and to generally align with the ANZECC guideline.

The scope of the program is as follows:

- Sampling of surface water at three sites established for this project; located upstream of works on Cabramatta Creek, downstream on Cabramatta Creek, and Georges River below confluence with Cabramatta Creek.
- Monthly frequency of monitoring, as well as during wet weather events.
- Measurement of parameters includes the following:
 - Physico-chemical indicators (pH, electrical conductivity, turbidity)
 - Total Suspended Solids (a sediment runoff indicator)
 - Nutrients - NH₃, NO₂, NO₃, TKN, TN, TP, SRP (indicators of runoff)
 - Heavy metals: Arsenic (As), Cadmium (Cd), Chromium (Cr), Copper (Cu), Lead (Pb), Mercury (Hg), Nickel (Ni) and Zinc (Zn)
 - Major urban pollutants: including BTEXN (Benzene, Toluene, Ethylbenzene, Xylene, Naphthalene), phenols and poly-aromatic hydrocarbons (PAHs)
 - Microbiological indicators of faecal contamination (*E. coli*, enterococci).

The selection of sites for surface water monitoring considered sites that have permanent water; are located upstream and downstream of the most likely impact area, and where access is practical and permitted. Three sites were required to be identified, including upstream of works on Cabramatta Creek, downstream on Cabramatta Creek, and Georges River below confluence with Cabramatta Creek.

This report describes monitoring performed through the pre-construction period, and has been compiled into a 'baseline' dataset of water quality. The twelve month sampling program accounts for seasonal variations through monthly sampling over this period. The program is to continue as determined and agreed by both ARTC and their construction contractor for the project as desired to achieve the IS v2.0 compliance requirements in Table 1.1. The main guidelines considered in compiling the scope for this program are listed below:

- ANZECC (2000) Australian and New Zealand guidelines for fresh and marine water quality. National Water Quality Management Strategy, Australian and New Zealand Environment and Conservation Council and Agriculture and Resource Management Council of Australia and New Zealand, Canberra.
- ISCA (2018) Infrastructure Sustainability rating tool version 2.0 Technical Manual Design and As Built, Sydney.

1.3 IS v 2.0 Compliance

This report has been prepared for ARTC to support the achievement of a Bronze IS v2.0 Rating, addressing the requirement DL1.1 under the credit Env-1 'Receiving Water Quality'. Table 1.1

below outlines where this requirement and its associated must statements are addressed in this report.

Table 1.1 IS v 2.0 compliance with Env-1

IS v 2.0 requirements	IS v 2.0 Must statements	Where addressed in this report
DL1.1 Baseline studies of existing receiving water environment have been carried out for the project.	Baseline studies must be undertaken by a suitably qualified professional to identify the pre-existing water discharges and receiving water quality condition and environmental values prior to any potential project impacts.	See Appendix C for the CVs of the suitably qualified professionals involved in this baseline study. See section 1.2. for the objectives and scope of the baseline study.
	These studies must consider seasonal and rainfall effects, representative sampling and links to activities in the catchment likely to affect the baseline.	See section 2.1 and 2.2 for methodology, 2.3 for sampling locations, and section 3.1, 3.5 and 4.1.1 for rainfall effects.
	Baseline measurements are required to show the effectiveness of management and mitigation measures during the whole of life of the asset. Therefore, the baseline assessment must identify the relevant environmental parameters and the minimum time and location monitoring requirements to suitably demonstrate change in environmental impacts throughout the duration of the construction and operational phases.	For the monitoring requirements of this monitoring program see section 2 for methodology, and see section 4.2. Monitoring requirements during construction and operations phases to be agreed by ARTC and construction contractor.
	The following must be included in the assessment:	
	<ul style="list-style-type: none"> • Peak and average measurements of monitoring parameters 	See section 3 (specifically Table 3.2 – Table 3.11).
	<ul style="list-style-type: none"> • Seasonal and/or time of day variations (whichever is most appropriate for accurate baselines to be established) 	See section 3 (specifically Figure 3.2 - Figure 3.11) and section 3.6.
	<ul style="list-style-type: none"> • Specific local variations, representative sampling and links to activities likely to affect the baseline (such as urban stormwater contributing to increases in impact) 	See section 3.2.5 on enterococci and 4.1.1 on rain events.
<ul style="list-style-type: none"> • The measurement criteria/indicators/factors used in the assessments and associated justification of how these link to goals. 	See section 2.4 and Table 2.2 for measurement criteria and for how goals have been adjusted to be site specific (see 20 and 80 th percentile values included in sections 3.2 and recommended values in section 3.3 for recommended site specific guideline levels)	

2. Methodology

As described above in section 1.2, the methodology and scope for the monitoring program has been developed largely based on the following guidelines;

- ANZECC (2000) Australian and New Zealand guidelines for fresh and marine water quality. National Water Quality Management Strategy, Australian and New Zealand Environment and Conservation Council and Agriculture and Resource Management Council of Australia and New Zealand, Canberra.
- ISCA (2018) Infrastructure Sustainability rating tool version 2.0 Technical Manual Design and As Built, Sydney.

2.1 Routine sampling

The monthly routine sampling of the three surface water sites was planned to be performed sufficiently early each month, time and resources permitting, so as to allow for wet weather events should they occur. This occurred for the majority of the sampling events across the monitoring period. Sites have been selected based on there ideally being safe and ready access, on the presence of permanent water in the waterway where possible, and having points both upstream and downstream of construction activities.

2.2 Rain event sampling

The program includes the monitoring of additional rain events during the pre-construction phase. Rainfall can transport greater pollutant loads compared to dry weather base flows. Data from wet weather samples will demonstrate the variability in pollutant concentrations at each of the sample sites through time. These data are likely to provide a greater level of detail for assessment of the influence of urban development (including road construction) on adjacent waterways, and also how effective the construction impact mitigation measures are.

The pre-construction monitoring program was designed to capture two wet weather sampling events over a 12-month period, with at least one month between each wet weather sampling event. Due to the dry and temporally inconsistent rainfall throughout the 12-month monitoring period, only one wet weather sampling event was possible.

The analysis of wet weather samples is the same as for dry weather samples. This is to allow a direct comparison with samples collected during dry weather. A wet weather sampling trigger condition of >20 millimetres in a 24 hour period was used, based on data reporting from the Bureau of Meteorology (BOM) Station 66137 at Bankstown Airport, which is proximate to the project area. This amount of rainfall should result in substantial flows in the local waterways, and potentially result in runoff from construction areas if they are not adequately secured.

One wet weather sampling event on 7 February 2020 was triggered , following rainfall at Station 66137 of 48.2 millimetres in the preceding 24 hours.

2.3 Surface water monitoring sites

In preparing this monitoring program, GHD undertook a desktop analysis of the project area, to identify sampling locations that were readily accessible and were likely to have persistent surface water. The accessibility of locations were then ground-truthed by field work and in consultation with administering authorities for the sites where relevant.


The identified surface water sites are summarised in Table 2.1 and in Figure 2.1, along with their approximate locations and comments on their inclusion. The sites identified have been selected as they provide a location/s to:

1. Upstream: Provide a control site to understand water quality conditions upstream of the sproject site.
2. Downstream: Identify impact from the project (should the project be in construction or operation).

3. Georges River: Identify any prevailing impact (should the project be in construction or operation), if any, in to the ultimate receiving environment of Cabramatta Creek.

Table 2.1 Surface water monitoring locations

Location Code	Approximate Latitude	Approximate Longitude	Description	Comments
Upstream	-33.904609	150.934554	Cabramatta Creek upstream of rail corridor	Adjacent to Don Dawson Oval (Cabramatta Sportsground) and Cabramatta Leagues Club Oval.
Downstream	-33.903617	150.937327	Cabramatta Creek downstream of rail corridor	Accessed via cycleway at the end of Broomfield Street, immediately downstream of culverts under cycleway.
Georges River	-33.905411	150.949327	Cabramatta Creek at the confluence with the Georges River	Accessed via Cherrybrook Park near look out area on the small peninsula on the left bank of the creek.

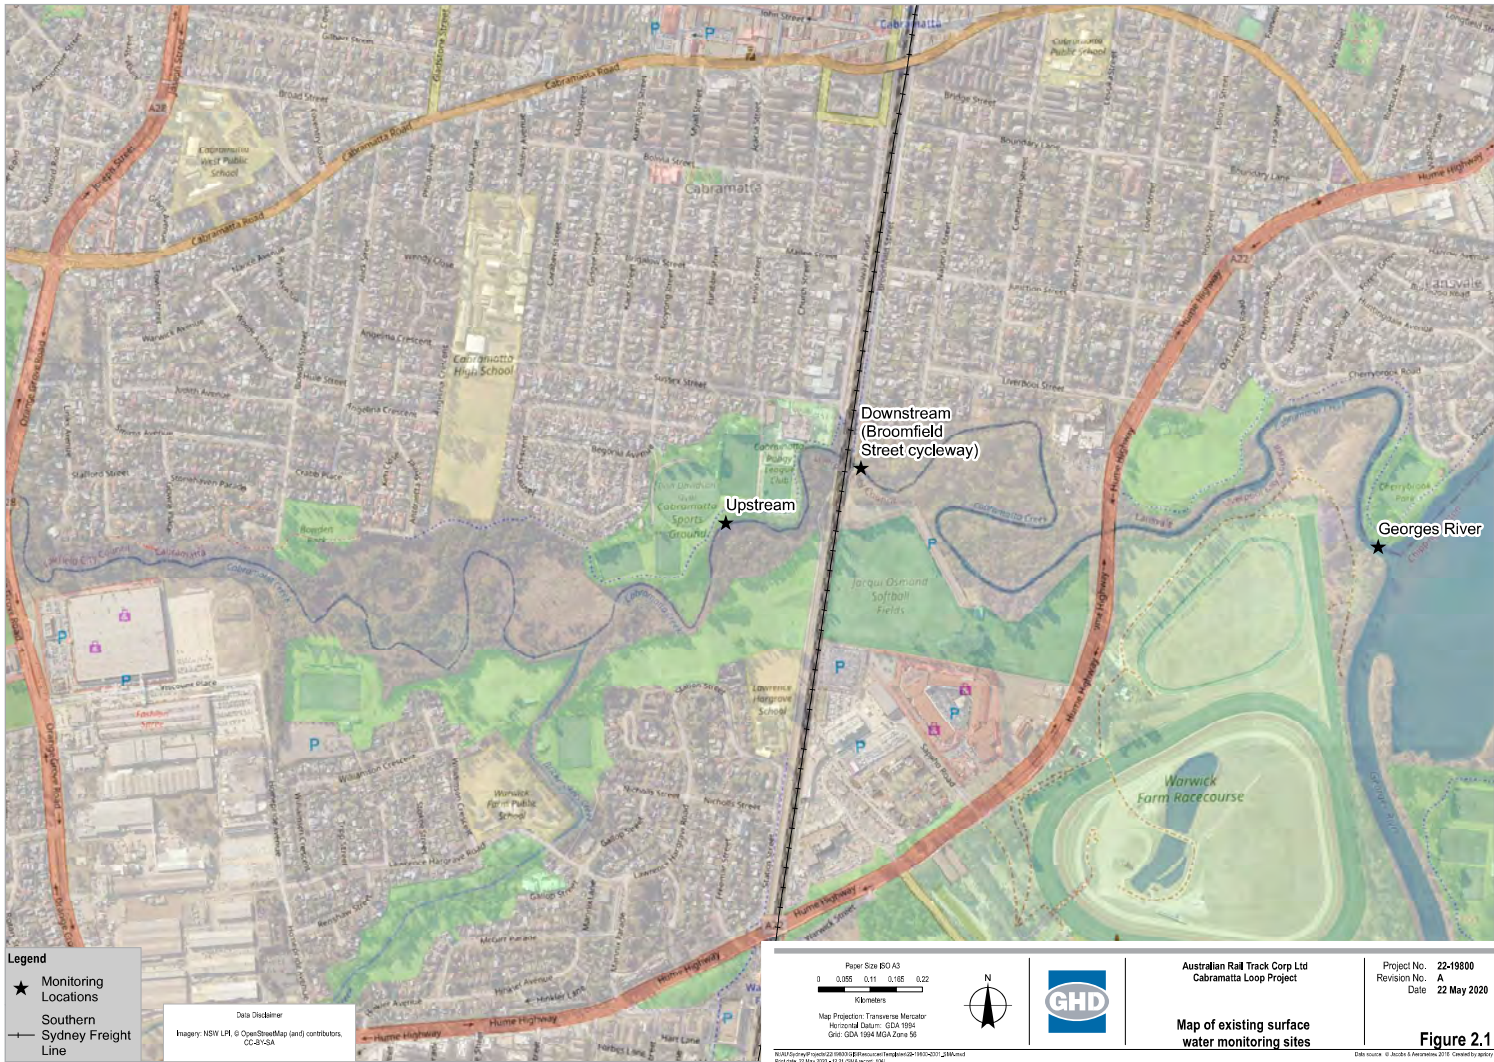

Legend

- ★ Monitoring Locations
- Southern Sydney Freight Line

Data Disclaimer
 Imagery: NBN LPE, © OpenStreetMap (and) contributors, CC-BY-SA

Paper Size: ISO A3
 0 0.095 0.11 0.165 0.22
 Kilometers



Australian Rail Track Corp Ltd
 Cabramatta Loop Project

Project No. 22-19800
 Revision No. A
 Date 22 May 2020

Map of existing surface
 water monitoring sites

Figure 2.1

Data source: © Airbus Defence and Space 2018. Created by gprky

2.4 Surface water monitoring

Water quality sampling was conducted in accordance with GHD's Standard Operating Procedures (SOP) for surface water quality sampling (GHD, 2017). This SOP complies with procedures detailed in the ANZECC (2000) Guidelines and the NSW EPA's Approved Methods for the Sampling and Interpretation of Results of Water Pollutants (EPA, 2004).

Monitoring sites were sampled routinely, on a monthly basis. At each site, grab samples were collected for laboratory analysis. In addition, relevant site descriptions and notes were taken for each site and visual observations made during each sampling run. Visual observations included: (a) Visual oil and grease; (b) The occurrence of algal scum; (c) Stream flows; (d) Water clarity; (e) Water colour, odour and any other notable observations.

Photos of each water quality sample site were taken to record the visual appearance of the site at the time of sampling. Where appropriate, photos of stream banks were taken providing a digital record of bank stability, geomorphology and riparian vegetation condition.

At each site, several sub-samples were taken from 100-200 millimetre depth (surface) using a long-handled sampling pole and bottle. The sub-samples were combined in a bucket to form a composite sample, from which the sample bottles for analyses were filled. The bucket and the sampling bottle were washed well between sampling sites to prevent cross contamination.

Water samples were transported in ice in an esky and submitted to ALS (Smithfield) a National Association of Testing Authorities, Australia (NATA) accredited laboratory, under Chain of Custody (CoC) requirements. Samples were analysed for the following:

- **Microbiological Public Health Indicators** – Enterococci and *E. coli*.
- **Water Quality Indicators** –
 - Total Suspended Solids (TSS), a sediment runoff indicator.
 - Nutrients – Ammonia (NH₃), Nitrite (NO₂), Nitrate (NO₃), Total Kjeldahl Nitrogen (TKN), Total Nitrogen (TN), Total Phosphorus (TP), Soluble Reactive Phosphorus (SRP), which are indicators of runoff.
- **Heavy metals** – As, Cd, Cr, Cu, Pb, Hg, Ni and Zn – These metals are often associated with run-off from construction activities from certain peri-urban landscapes, as the Project area.
- **Major urban pollutants:** including pesticides, BTEX, PAHs and phenols – These pollutants are associated with to run-off from construction activities in relation to roads and certain landscapes.

The sampling was undertaken by GHD staff with collection of samples using containers obtained from Australian Laboratory Services (ALS) Environmental. ALS is a NATA accredited laboratory and provide sterile containers for collecting samples. Collection of samples was performed in line with Approved Methods for the Sampling and Analysis of Water Pollutants in New South Wales (NSW Environmental Protection Agency (EPA), 2004). ALS testing processes follow ISO/IEC 17025 procedures before results are released. Results are released with Quality Assurance documentation detailing the quality assurance measures included in the testing.

2.5 Data management

All laboratory analysis data were managed using the ESDat water quality data management software and in Excel spreadsheets. Data was managed during sampling in line with ALS recommended procedures for labelling of sampled specimens.

2.6 Water quality and aquatic ecosystem guidelines

The ANZECC (2000) guidelines are trigger values for physical and chemical stressors for protection of waterway health. The guidelines are specific to the type of ecosystem being monitored, which, in this case, are lowland rivers. Freshwater lake ecosystem values are also noted here to provide context. These guidelines are based on toxicological studies, which define trigger values for physical and chemical stressors at which an effect on aquatic ecosystem is observed.

The ANZECC (2000) guidelines relate to reference conditions of aquatic systems that are minimally disturbed, and therefore, they are regarded as conservative in relation to the current condition of the sampling locations. However, the trigger values can be used to assess the risks of adverse effects of excessive amounts of pollutants in various ecosystem types.

For the sites monitored in this project, the trigger values for south-eastern Australian lowland river ecosystems and more specifically NSW coastal rivers are most applicable. These trigger values prescribed in the ANZECC guideline are listed values for the parameters monitored in this project below in Table 2.2 and Table 2.3.

Table 2.2 ANZECC (2000) Guidelines default trigger values for aquatic ecosystems

Parameter	Significance of parameter	Guidelines	
		Lowland Rivers	Freshwater Lakes
pH	Extremes of pH can be directly toxic to biota, and can modify the effect of other stressors (eg release metals).	6.5 – 8.5 pH units	6.5 - 8.0 pH units
Electrical Conductivity (EC)	Levels typically elevated during periods of low flow and if affected by saline groundwater inputs. Changes in EC can alter the ecosystem composition and abundance of species.	125 - 2200 μ S/cm	20 - 30 μ S/cm
Turbidity	High turbidity is typical of disturbed catchments and during high flow events. Not toxic, but can affect ecosystems and biota.	6 - 50 NTU	1 - 20 NTU
Ammonium Nitrogen	Indicative of wastewater or fertiliser inputs. Toxic to aquatic life; Can directly affect ecosystems and biota through excessive algal growth and cyanobacterial blooms.	0.02 mg/L	0.01 mg/L
Oxides of Nitrogen (NOX)	Indicative of contamination by wastewater or fertilizer, stimulates phytoplankton; can directly affect ecosystems through excessive algal growth and cyanobacterial blooms.	0.04 mg/L	0.01 mg/L
Total Nitrogen (TN)	Indicative of wastewater or fertiliser inputs. Includes ammonia, NO _x -N and other nitrogenous compounds, can be indicative of inputs from wastewater and other diffuse sources. Can directly affect ecosystems and biota through excessive algal growth and cyanobacterial blooms.	0.5 mg/L	0.35 mg/L
Total Phosphorus (TP)	Indicative of wastewater or fertiliser inputs. Key nutrient determinant for growth, can stimulate growth and is frequently the limiting nutrient for algal growth.	0.05 mg/L	0.01 mg/L
Total Suspended Solids (TSS)	Reduces light penetration of water, and can affect some forms of aquatic life. May indirectly affect the effect of stressors such as temperature and DO.	No guideline	

Guideline values for lowland rivers are shaded in pale blue, and for freshwater lakes are shaded pale green. As noted earlier, the monitoring sites have been compared against the lowland rivers values. The pale blue shading is used throughout this report where the lowland river values have been applied.

Table 2.3 ANZECC (2000) guidelines default trigger values for metals in aquatic ecosystems

Parameter	Trigger values (95 %)	
	Freshwater	Marine water
Arsenic	0.024 mg/L	-
Cadmium	0.0002 mg/L	0.0055 mg/L
Chromium	0.001 mg/L	0.0044 mg/L
Copper	0.0014 mg/L	0.0013 mg/L
Nickel	0.011 mg/L	0.07 mg/L
Lead	0.0034 mg/L	0.0044 mg/L
Zinc	0.008 mg/L	0.015 mg/L

The ANZECC (2000) guidelines include guidance for faecal coliform and enterococci concentrations in recreational waters. However, in practice this guidance has been updated by the National Health and Medical Research guidelines for the management of recreational waters (NHMRC, 2008), which aim to protect human health from hazards that may occur in recreational waters. NHMRC (2008) uses enterococci monitoring as the primary indicator of potential faecal contamination in waters, particularly saline waters, and is intended for use with large datasets of routine monitoring data. *E. coli* concentrations are also used in NHMRC (2008); *E. coli* are a subset of the faecal coliform group of enteric bacteria, and in environmental use are frequently the equivalent of faecal coliforms. Both *E. coli* and enterococci have been monitored here to allow comparability with both sets of guidelines, and the monitoring results compared against the ANZECC guideline concentrations for primary contact recreation (a median concentration of ≤ 35 CFU/100 mL enterococci, and ≤ 150 faecal coliform CFU/100 mL) and secondary contact recreation (≤ 230 enterococci CFU/100 mL, and ≤ 1000 faecal coliform CFU/100 mL)

2.7 Data analyses and presentation

The data for various monitored parameters were analysed by Excel 2016. With regard to the results presented in Section 3 as tables and figures, the following observations are highlighted:

- Descriptive summary statistics were generated (ie Minimum, Maximum, Mean, Median, 20th and 80th Percentile) and presented in tables. The tables also indicate how many results are above or below the selected water quality guideline.
- In addition, line plots were generated for easy depiction of variations of results over time of many parameters across the sampled sites.

3. Results

3.1 Rainfall

The BOM rainfall gauging station 66137 at Bankstown Airport is located near to the project area. This station was used to establish a rainfall threshold to mobilise for wet weather sampling events.

Data from the Bankstown Airport station were available between July 1968 and April 2020. The station data are tabulated in Table 3.1, summarising the monthly and annual rainfall for all data for the station (long-term mean and medians), and the monthly rainfall for the station between May 2019 and April 2020.

From the station data, the long-term average annual rainfall was 866.5 millimetres. The sum of the monthly median rainfalls was 649.6 millimetres.

When the period May 2019 to April 2020 is considered, the total rainfall was 966.0 millimetres. From this data, the total rainfall in the current reporting period was slightly greater than the long-term average, and substantially greater than the long term median.

Whilst the overall amount of rainfall was similar to the long term average, the distribution of rainfall was different. Rainfall was extremely light throughout most of the reporting period, with the exception of September 2019, and February to April 2020. Eight of the twelve months in the period were drier than the corresponding long-term median, including very dry months such as May 2019 (6.4 millimetres rainfall) and December 2019 (5.2 millimetres). Most of the rainfall recorded fell during the February 2020 event; 327.8 millimetres fell between 7 and 10 February, and 159.6 millimetres was recorded on 10 February alone. To date, this was the fourth-largest amount of rainfall ever recorded on a single day by this gauge, exceeded previously on 6 August 1986, 3 February 1990, and 11 June 1991.

The daily rainfall for the Bankstown Airport station between May 2019 and April 2020 is shown in Figure 3.1.

One wet weather event was sampled between May 2019 and April 2020, on 7 February 2020.

Table 3.1 Summary of rainfall (mm) at Bankstown Airport station 066137

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	TOTAL
Long-term average rainfall (mm), July 1968 - April 2020	93.0	107.5	100.6	82.4	63.5	80.3	42.7	49.2	44.6	60.1	75.4	67.2	866.5
Long-term median rainfall (mm), July 1968 - April 2020	74.6	77.0	82.1	53.8	51.4	57.2	29.6	24.6	37.0	39.2	67.8	55.3	649.6
Current reporting period rainfall (mm), May 2019 – April 2020	67.8	380.2	104.0	156.2	6.4	63.6	22.4	30.8	83.8	21.6	24.0	5.2	966.0

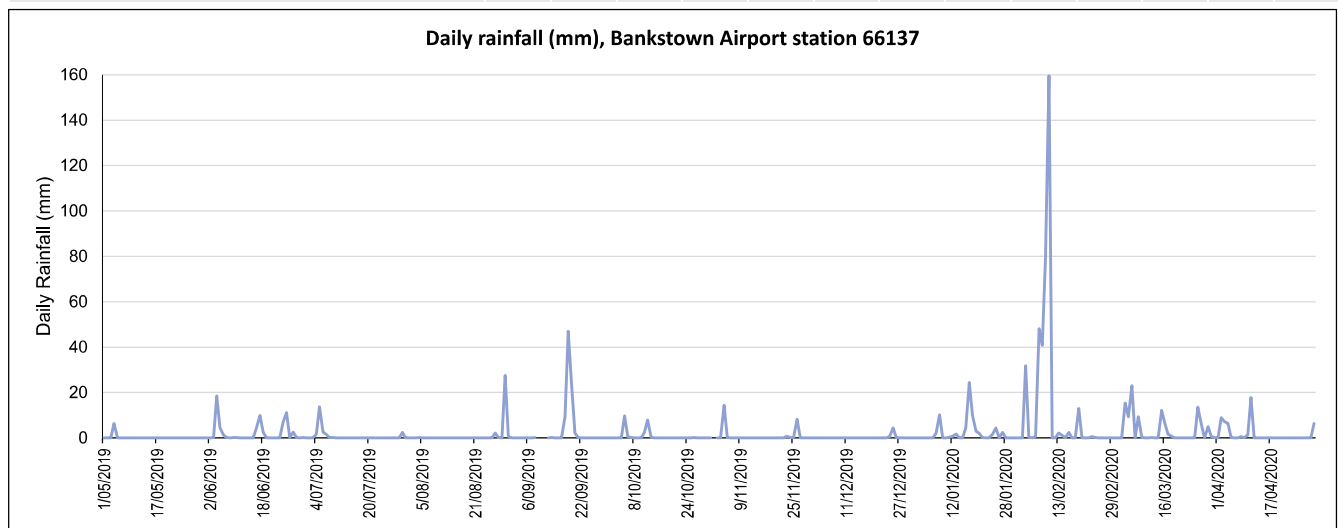


Figure 3.1 Daily rainfall at Bankstown Airport, May 2019 to April 2020

3.2 Surface water monitoring results

The monitoring data for the surface water sites are examined in this section. These include summaries of the monitoring between May 2019 and April 2020, with comparison against the ANZECC and other applicable guidelines.

The 20th and 80th percentile concentrations of the data for each parameter have been calculated. Typically these constitute the baseline period for the project, comparison against data gathered for the reporting presented here to be used in subsequent reporting periods as determined by ARTC.

The applicable ANZECC trigger value (guideline) and the numbers of results greater than the upper ANZECC guideline and less than the lower ANZECC guideline (where applicable) are summarised. This provides context as to what results for that parameter would ideally be achieved in a minimally-disturbed waterway.

The ANZECC guidelines for some parameters vary depending on whether a site is a waterway or a lake. The monitoring sites presented in this report have all been compared against waterway guideline values. The lake guideline values are noted so as to provide some context.

For each parameter, all of the current study period data are compared in a figure. The routine (dry weather) data are presented as lines, whilst the wet weather data are separate and presented as single points. The ANZECC guideline thresholds for flowing waterways are shown as red lines, so as to provide further context.

3.2.1 pH

Most of the adverse effects of pH in water are associated with low pH values (acidic), effectively when pH of less than 6.5 is recorded. ANZECC (2000) states that almost all water quality guidelines around the world recommend that pH should be maintained in the range 6.5 to 9.0 to protect freshwater aquatic organisms. The ANZECC (2000) Guidelines for pH are 6.5 - 8.0 for freshwater lakes and reservoirs, and 6.5 – 8.5 for NSW lowland rivers.

The number of results is annotated as 'N'. The range, mean and median pH values observed in the dry weather sampling events are given in Table 3.2. Additionally, the results are summarised in Figure 3.2 to show the variations of measured values within each site.

The recorded pH data show this parameter to be quite stable over time, and within the ANZECC guideline range. One Upstream sample of pH 8.51 was above the ANZECC upper guideline value. The 20th and 80th percentile ranges of the three sites are between pH 7.0 and 7.9.

Wet weather did not result in observed changes to the pH at the sites.

Table 3.2 Measured pH (units) across sites

Site	N	Min	Max	Mean	Median	30 th %ile	20 th %ile	ANZECC upper guideline	#>ANZECC upper guideline	ANZECC lower guideline	#<ANZECC lower guideline	% outside guideline	Wet weather event 1
Upstream	12	6.91	8.51	7.44	7.45	7.63	7.06	8.5	1	6.5	0	8.33	7.46
Downstream	12	7.23	7.89	7.52	7.47	7.83	7.30	8.5	0	6.5	0	0	7.48
Georges River	12	7.29	7.81	7.59	7.67	7.73	7.41	8.5	0	6.5	0	0	7.61

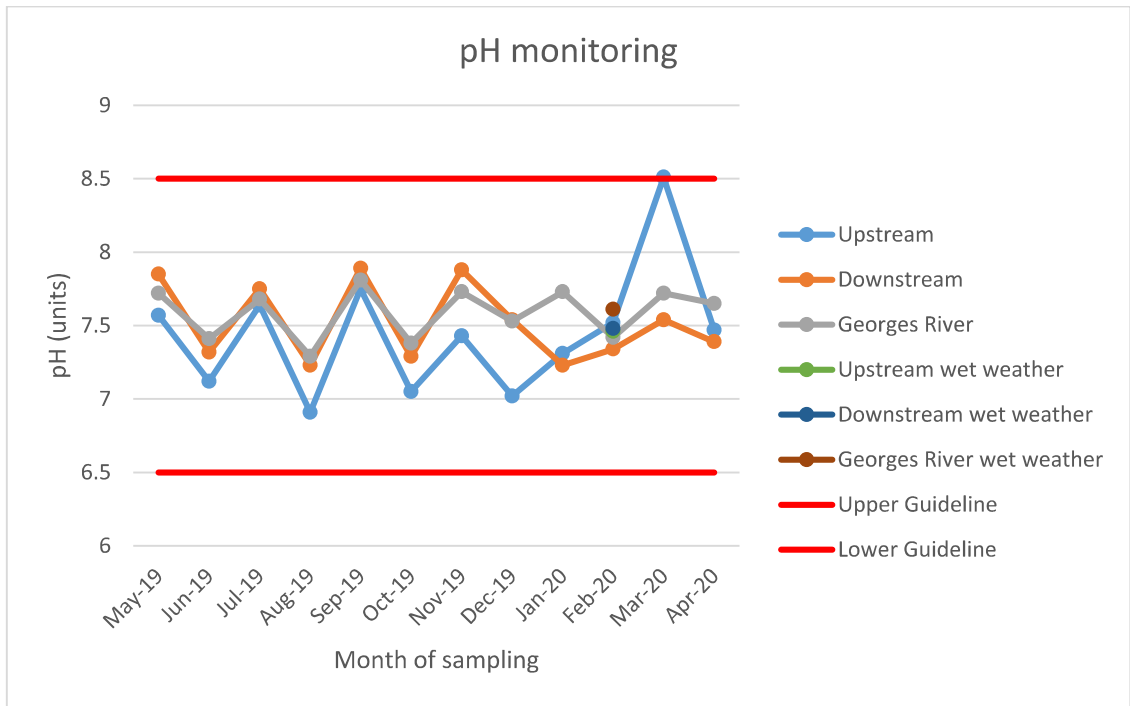


Figure 3.2 Measured pH across the monitored sites

3.2.2 Electrical Conductivity (EC)

EC is a measure of the types of salts (ions) in water, including anions: chlorides; sulphates; carbonates; phosphates and nitrates, as well as cations: sodium; calcium; magnesium and potassium. Concentrations of individual ions contributing to EC can vary. Metallic ions could also raise EC in water, which is affected by geology and soils; land use and catchment run-off, from agriculture, irrigation, urban and industrial development, including discharges of various effluents; and by groundwater inflows.

Sources of high EC include urban run-off containing salt, fertilisers, and organic matter. High levels of EC are also caused by clearing of vegetation and the resultant rise in the water table, excessive irrigation, and groundwater seepage.

Salinity in water ecosystems that is elevated towards marine concentrations is known to be harmful to freshwater aquatic organisms, as reflected in the ANZECC (2000) EC guidelines. Therefore, it is possible to predict that such high ionic contents in the waterbodies are likely to change the freshwater environment into a part-saline habitat. If such a change occurs, biotic communities may also change, over time, as a result.

Table 3.3 below presents the EC data for surface water, and Figure 3.3 shows the variations of measured values across the sites. The ANZECC (2000) guideline range for EC in NSW coastal lowland rivers is 200-300 $\mu\text{S}/\text{cm}$, and is applicable to flowing creeks. However, this guideline also state that Australia's east flowing lowland rivers could have EC as high as 2200 $\mu\text{S}/\text{cm}$ and should be above 125 $\mu\text{S}/\text{cm}$, as noted in Table 2.2. The 2200 $\mu\text{S}/\text{cm}$ threshold has been used as the upper guideline in the calculations in Table 3.3, and the 300 $\mu\text{S}/\text{cm}$ upper guideline value is indicated in Figure 3.3.

The following observations can be made on the results tabulated in Table 3.3:

- Increased EC between upstream and downstream sites. Increased tidal influence further downstream. This is demonstrated by the results at the Georges River location where EC results were exceeded the guideline value for 9 of the 12 sampling events.

- Georges River showed substantially greater EC than the other sites – even greater tidal effect.
- Unlikely that these sites will influence EC in the Georges River, and some increase in EC is to be expected from Upstream to Downstream sites. However if substantial increases are seen during construction or post-construction phases, inputs other than tidal influences may still need consideration.
- The wet weather data showed clearly reduced EC at the sites, which can be attributed to dilution by stormwater flows.

Table 3.3 Measured EC (µS/cm) concentrations across sites

Site	n	Min	Max	Mean	Median	30 th %ile	20 th %ile	ANZECC upper guideline	#>ANZECC upper guideline	ANZECC lower guideline	#<ANZECC lower guideline	% outside guideline	Wet weather event 1
Upstream	12	480	833	637	645	746	516	2200	0	125	0	0	218
Down-stream	12	549	4530	1068	717	963	597	2200	1	125	0	8.3	228
Georges River	12	825	23400	10304	9680	17280	2940	2200	10	125	0	83.3	433

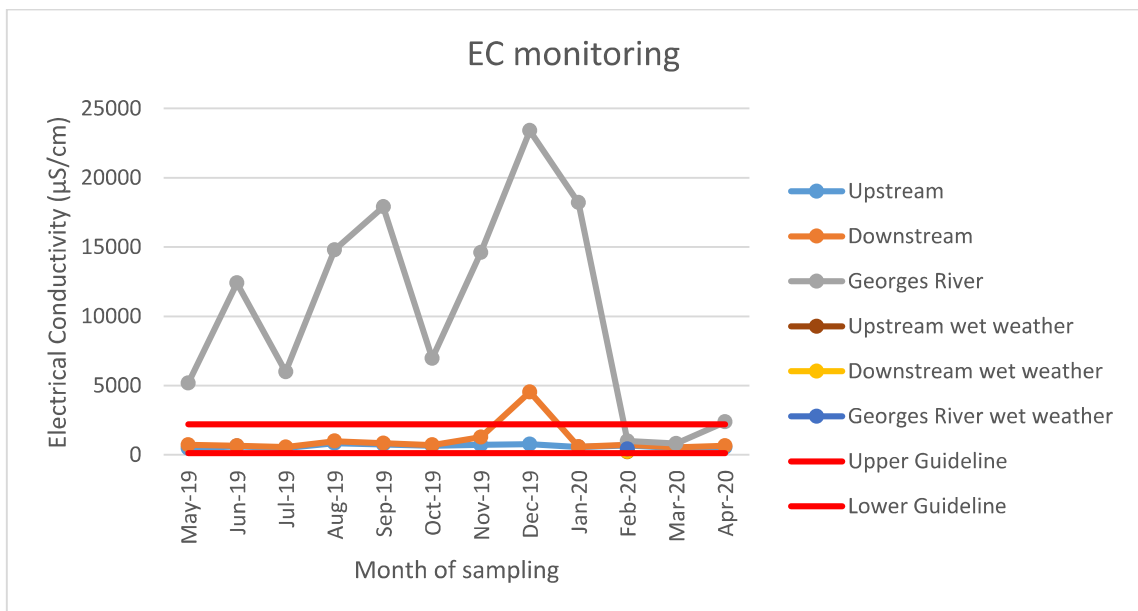


Figure 3.3 Measured EC (µS/cm) across the monitored sites

3.2.3 Turbidity

Turbidity, directly measured *in situ* by the water quality probe, provides readings which express how light is scattered by suspended particulate material in the water. These results, given in *Nephelometric Turbidity Units* (NTU), generally provide a good correlation with the concentration of particles in the water that affect water clarity and phytoplankton productivity.

Although high turbidity is often a sign of poor water quality and land management, crystal clear water does not always guarantee healthy water. Extremely clear water can signify very acidic conditions, or high levels of salinity. The ANZECC (2000) Freshwater Guidelines give a trigger value of 6-50 NTU for turbidity in lowland rivers.

The turbidity recorded at all sites in dry weather was below the 50 NTU ANZECC upper guideline. A number of samples at all sites were below the 5 NTU lower guideline, this was attributed to the salinity of the sites as recorded in the EC present. Whilst these samples are regarded as outside the guideline range, the low turbidity can be expected due to natural processes present at the sites.

The measured wet weather turbidities were greater than the maximum dry weather results for this parameter. This could be attributed to turbid inflows resulting from wet weather, as well as the dilution of the site salinities from stormwaters. Table 3.4 and Figure 3.4 below presents the turbidity data for surface water, and Figure 3.4 shows the variations of measured values across the sites.

Table 3.4 Measured Turbidity (NTU) across sites

Site	N	Min	Max	Mean	Median	80th %ile	20th %ile	ANZECC upper guideline	#>ANZECC upper guideline	ANZECC lower guideline	#<ANZECC lower guideline	% outside guideline	Wet weather event
Upstream	12	2.2	19.0	8.9	7.5	12.0	5.6	50	0	6	4	33.3	38.9
Downstream	12	1.0	10.1	5.1	5.2	6.6	3.2	50	0	6	8	66.7	41.3
Georges River	12	2.3	24.7	8.0	5.5	10.4	4.3	50	0	6	7	58.3	27.4

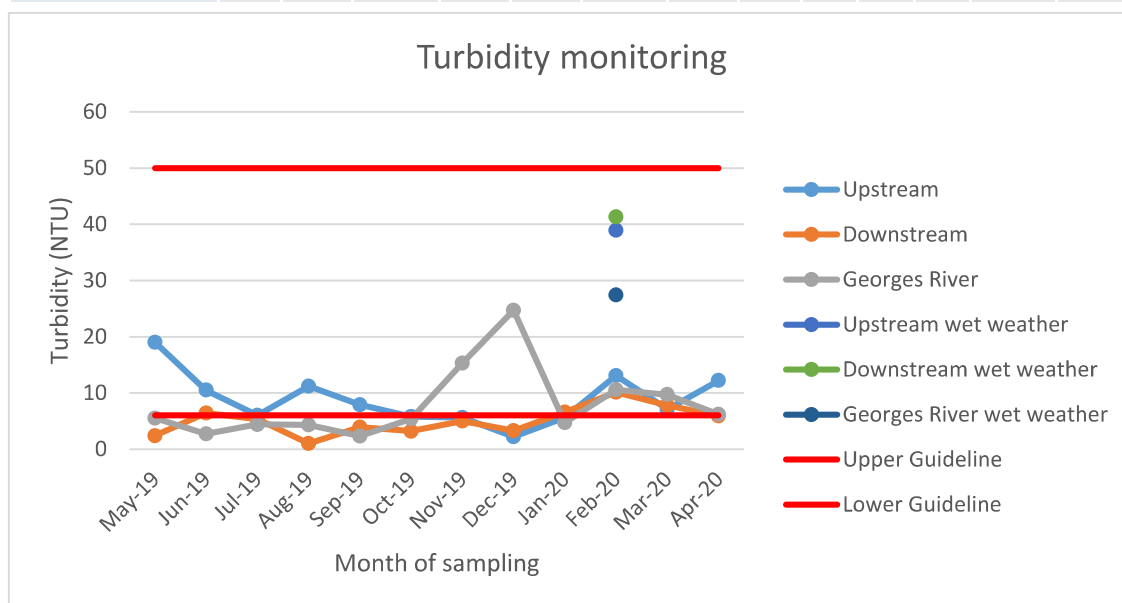


Figure 3.4 Measured Turbidity (NTU) across the monitored sites

3.2.4 Total Suspended Solids (TSS)

Suspended solids consist of an inorganic fraction (silts, clays, etc.) and an organic fraction (algae, zooplankton, bacteria, and detritus) that are carried along by water as it runs off the

land. When suspended particles settle to the bottom of a water body, they become sediments or 'silt'. The inorganic portion is typically considerably higher than the organic fraction. Turbidity is correlated with the force of moving water, which keeps the particles suspended.

Suspended solids reduce sunlight penetration, reducing algal photosynthesis, thereby controlling phytoplankton abundance and the abundance of animals that feed on algae. Suspended solids also clog fish gills, either killing them or reducing their growth rate. When suspended sediment settles out and drops to the bottom, this causes the water to clear, but as the silt or sediment settles, it may change the nature of the lake bottom. The silt may be unfavourable to bottom-dwelling organisms, as it may cover breeding areas, and smother eggs.

Indirectly, suspended solids affect other water quality parameters, such as temperature and dissolved oxygen. Because of the greater heat absorbency of the particulate matter, the surface water becomes warmer and this tends to stabilize the stratification (layering) in lakes. This, in turn, interferes with mixing, decreasing the dispersion of oxygen and nutrients to deeper layers. Siltation (sediment deposition), may eventually fill up the water body converting it into a wetland.

A positive effect of the presence of suspended solids in water is that toxic chemicals, such as pesticides and metals tend to adsorb to them, or become complexed with them, which makes the toxins less available to be absorbed by living organisms.

There are no quantitative criteria for TSS in ANZECC (2000) Guidelines; however, in USA, Kentucky Water Quality Standards for aquatic life state that suspended solids "...shall not be changed to the extent that the indigenous aquatic community is adversely affected..." and "...the addition of settleable solids that may adversely alter the stream bottom is prohibited..."

The US National Academy of Sciences has recommended that the concentration of TSS should not reduce light penetration by more than 10%. In a study in which TSS concentrations were increased to 80 mg/L, the macroinvertebrate population was decreased by 60 % (<http://kywater.org/ww/ramp/rmtss.htm>). In the absence of any other guideline, a TSS concentration of 80 mg/L could be used as the uppermost level, not to be exceeded.

The observed range, mean and median TSS concentrations are shown in Table 3.5 below. The variation of measured values across the monitored sites is also shown in Figure 3.5.


The TSS concentrations at the sites were uniformly below the adopted guideline concentration of 80 mg/L. TSS concentrations were usually greater at the Georges River site than the other two sites.

Wet weather resulted in somewhat elevated TSS concentrations at all sites, however these were still less than 80 mg/L. Some increases can be expected with wet weather inflows to waterways.

Table 3.5 Measured total suspended solids (mg/L) across sites*

Site	N	Min	Max	Mean	Median	80th %ile	20th %ile	Adopted upper guideline	#>Adopted upper guideline	Lower guideline	#<Lower guideline	% outside guideline	Wet weather event
Upstream	12	2.5	16.0	8.6	8.5	11.6	4.4	80	0	N/A	-	0	29
Downstream	12	2.5	15.0	5.7	2.5	8.4	2.5	80	0	N/A	-	0	36
Georges River	12	2.5	57.0	13.8	9.0	19.4	3.2	80	0	N/A	-	0	34

* US EPA Guideline 80 mg/L adopted.

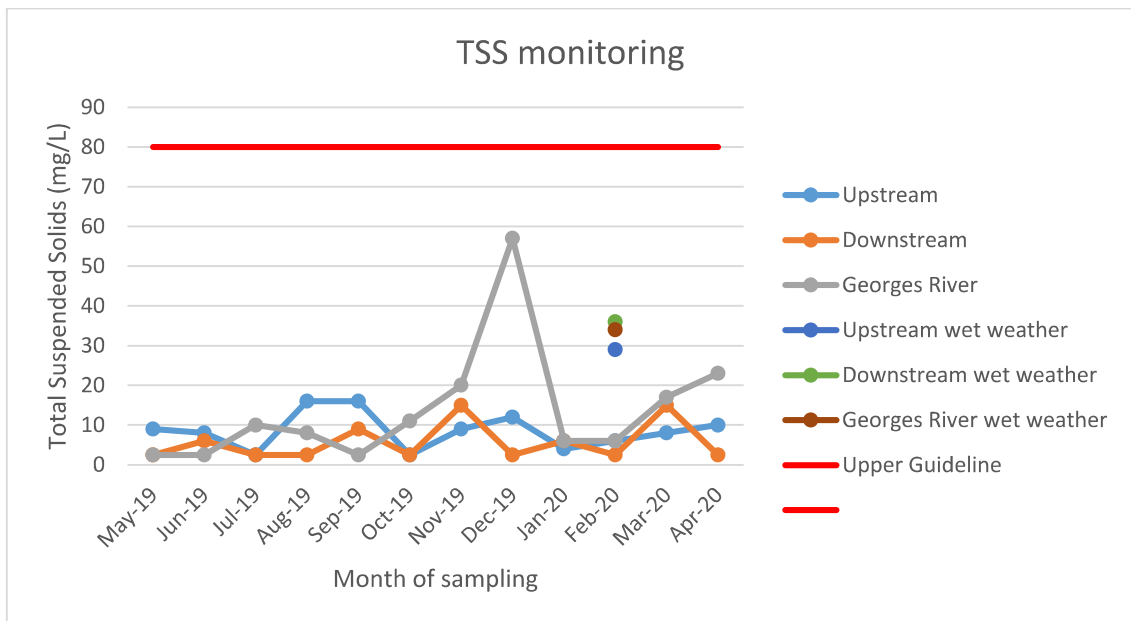

Note: The red line indicates the adopted guideline (80 mg/L, see text for details)

Figure 3.5 Measured TSS (mg/L) across sites

It should be noted that TSS is an important parameter to be measured in waterways that may be impacted by construction activities. Elevated TSS, which is often transient, may not always be ecologically significant for biota. However, it is generally considered a good indicator of how effective the sediment and runoff controls and other mitigation measures might be, which are taken to reduce adverse impacts on downstream waterways.

To enable some comparison between turbidity and TSS data, these have been presented on the same chart in Figure 3.6. Please note that the axes are changed from the earlier figures so as to allow a comparison of these two parameters. As can be seen, there are some similarities between the patterns of these parameters, such as the concentration spikes for the Georges River site in December 2019 for both turbidity and TSS. Other smaller variations are not always corresponding in both parameters, which can be expected due to the different effects on the parameters by different suspended materials.

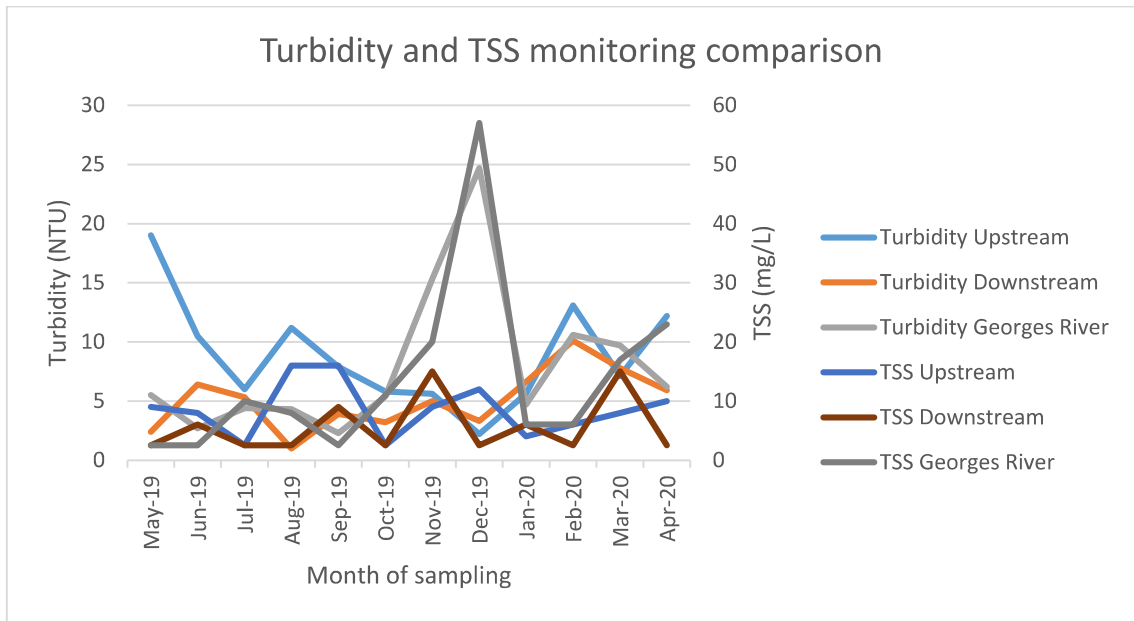


Figure 3.6 Measured turbidity and TSS monitoring data

3.2.5 Enterococci and *E. coli*

The bacterial contamination of water has been tested by the abundance of enterococci and *E. coli*. These bacteria are present specifically in the gut and feces of warm-blooded animals. As a consequence, enterococci and *E. coli* counts are considered an accurate indicator of animal or human waste contamination of waterbodies or water supplies. The ANZECC guideline concentrations for primary contact recreation (a median concentration of ≤ 35 CFU/100 mL enterococci, and ≤ 150 faecal coliform CFU/100 mL) and secondary contact recreation (≤ 230 enterococci CFU/100 mL, and ≤ 1000 faecal coliform CFU/100 mL) have been used here to provide comparative context for these results. *E. coli* are a sub-group of faecal coliforms, and make up the overwhelming majority of faecal coliforms present in faecal contamination, and have been used as a functionally equivalent measure of faecal coliforms here. Whilst these guideline values are intended to be compared against the median values of ongoing monitoring, they have been used here as a measure of how frequently elevated concentrations occur.


From the dry weather sampling, the Upstream and Downstream sites recorded greater concentrations than the Georges River site, typically by approximately an order of magnitude. Additionally, the Upstream site usually recorded greater concentrations than the Downstream site. This can be attributed to upstream inputs of faecal contamination, with progressive downstream dilution. The Upstream site recorded nine of 12 samples with enterococci concentrations greater than the ANZECC secondary contact recreation guideline, compared to four of 12 samples from the Downstream site, and one of 12 samples from the Georges River site.

All three sites recorded substantially increased enterococci concentrations following wet weather, of more than an order of magnitude at the Downstream and Georges River sites. This indicates the potential for wet weather flows to transport faecal contamination to all of these waterway sites. Table 3.6 and Figure 3.7 below presents the enterococci data for surface water, and Note: Red lines indicate the ANZECC Guidelines (35 CFU/100 mL for primary contact, and 230 CFU/100/mL for secondary contact recreation)

Figure 3.7 shows the variations of measured values across the sites.

Table 3.6 Measured Enterococci (CFU/100 mL) across sites

Site	N	Min	Max	Mean	Median	80 th %ile	20 th %ile	ANZECC primary contact guideline	#>ANZECC primary contact guideline	ANZECC secondary contact guideline	#<ANZECC secondary contact guideline	% outside secondary contact guideline	Wet weather event
Upstream	12	48	2000	623	450	896	148	35	12	230	9	75.0	10000
Down-stream	12	14	1200	249	110	360	48.4	35	10	230	4	33.3	13000
Georges River	12	1	350	54	26	43.2	8	35	5	230	1	8.3	8500

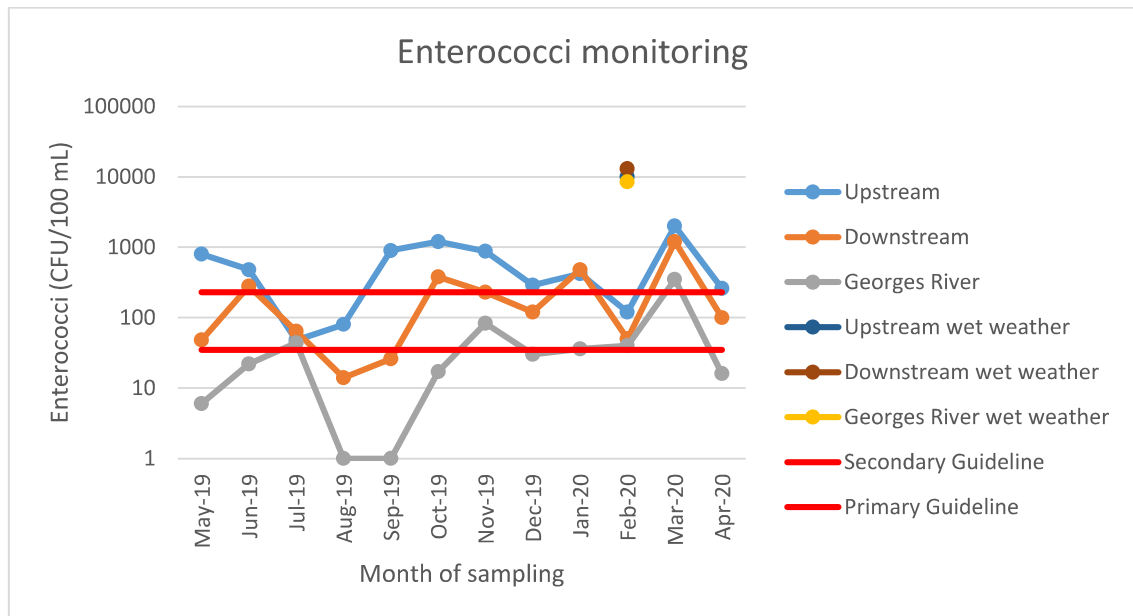


Note: Red lines indicate the ANZECC Guidelines (35 CFU/100 mL for primary contact, and 230 CFU/100/mL for secondary contact recreation)

Figure 3.7 Measured enterococci (CFU/100 mL) across sites

The *E. coli* concentrations at the tested sites were similar to those observed for enterococci, with the same samples showing elevated concentrations. Fewer samples were elevated above the secondary contact guideline concentration than was the case with enterococci concentrations, which may be attributed to decreased survival times of *E. coli* in saline waters. This differential survival has led to enterococci being the preferred indicator of faecal contamination of marine and estuarine waters (NHMRC, 2008).

Table 3.7 Measured *E. coli* (CFU/100 mL) across sites

Site	N	Min	Max	Mean	Median	80 th %ile	20 th %ile	ANZECC primary contact guideline	#>ANZECC primary contact guideline	ANZECC secondary contact guideline	#<ANZECC secondary contact guideline	% outside secondary contact guideline	Wet weather event
Upstream	12	73	2900	861.9167	565	1044	504	150	11	1000	3	25.0	12
Down-stream	12	54	3600	637.8333	370	540	168	150	10	1000	1	8.3	12
Georges River	12	12	1500	256.8333	88	270	18.4	150	3	1000	1	8.3	12

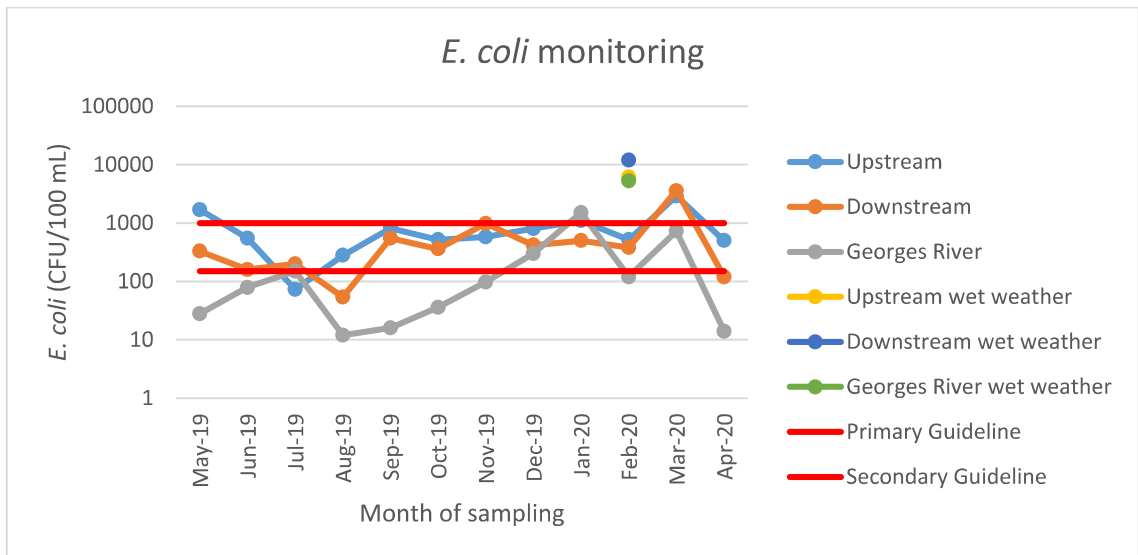

Note: Red lines indicate the ANZECC Guidelines (150 CFU/100 mL for primary contact, and 1000 CFU/100/mL for secondary contact recreation)

Figure 3.8 Measured *E. coli* (CFU/100 mL) across sites

3.2.6 Nutrients

Of the range of parameters monitored as aquatic ecosystem health indicators in the monitoring program, algal growth nutrients (nitrogen, N; and phosphorus, P) are the most significant. The concentrations of N and P provide useful information on the changes that are occurring in the waterways and waterbodies of the project area.

The discussion below provides the context for the monitoring of aquatic ecosystem health indicators that are relevant to managing the construction impacts of the project.

Nitrogen relationships

Nitrogen is the most abundant element and about 80% of the air we breathe is nitrogen. It is found in the cells of all living things, as a major component of proteins. Inorganic nitrogen may exist in the free-state as gaseous nitrogen (N₂); or ammonia (NH₃); or as oxides (nitrate (NO₃⁻); nitrite (NO₂⁻). Organic N is found in proteins, and is continually recycled by plants and animals.

Concentrations of these N species and total nitrogen (TN) are major indicators of aquatic ecosystem health (ANZECC, 2000). TN is the sum of organic nitrogen, NO_x and ammonia:

$$\text{TN} = (\text{organic nitrogen}) + (\text{NO}_3^-) + (\text{NO}_2^-) + (\text{NH}_3)$$

By definition, Total Kjeldahl Nitrogen (TKN), a component of TN, is the sum of organic nitrogen and ammonia. Therefore, the above equation may be re-written as:

$$\text{TN} = (\text{TKN}) + (\text{NO}_3^-) + (\text{NO}_2^-)$$

Ammonia

High levels of ammonia in water indicate poor water quality, as ammonia is a waste product and at high concentrations is toxic to most aquatic life, including fish. Ammonia toxicity to aquatic life increases as pH decreases, and as temperature decreases. Plants are more tolerant of ammonia than animals, and invertebrates are more tolerant than fish. High concentrations adversely affect structural development, hatching and growth rates of fishes.

Most of the ammonia produced in Australia is used in fertilizers - as ammonium sulfate, nitrate and urea. It is also used in the production of ice and in refrigerating plants, and in household cleaning products. Since ammonia is a decomposition product from urea and protein, it is found in domestic wastewater. Aquatic life and fish also contribute to ammonia levels in a water body.


Summary statistics for ammonia concentrations measured at the monitored sites are given in Table 3.8 and the variation of measured values in ammonia concentrations across the sites shown in Figure 3.9.

Ammonia concentrations exceeded the ANZECC guideline (0.02 mg/L) in several samples at all sites. This included 4 of 12 samples from the Upstream site, 7 of 12 samples Downstream, and 8 of 12 samples from the Georges River site. The maximum concentrations for the Upstream (0.14 mg/L) and Downstream (0.05 mg/L) sites were relatively similar to the guideline threshold, in contrast the Georges River site maximum concentration (0.7 mg/L) was markedly greater.

The wet weather ammonia concentrations were similar to the dry weather medians for the Upstream and Georges River sites, contrasting with a higher concentration than the dry weather maximum in the Downstream site. This is attributed to wet weather inflows of nutrients at the Downstream site, that had not yet wash through via stormwater flows.

Table 3.8 Measured ammonia (mg/L) concentrations across sites

Site	N	Min	Max	Mean	Median	80 th %ile	20 th %ile	ANZECC upper guideline	#>ANZECC upper guideline	ANZECC lower guideline	#<ANZECC lower guideline	% outside guideline	Wet weather event
Upstream	12	0.005	0.14	0.032	0.02	0.038	0.008	0.02	4	N/A		33.3	0.02
Down-stream	12	0.005	0.05	0.028	0.03	0.04	0.02	0.02	7	N/A		58.3	0.11
Georges River	12	0.005	0.7	0.085	0.03	0.03	0.01	0.02	8	N/A		66.7	0.06

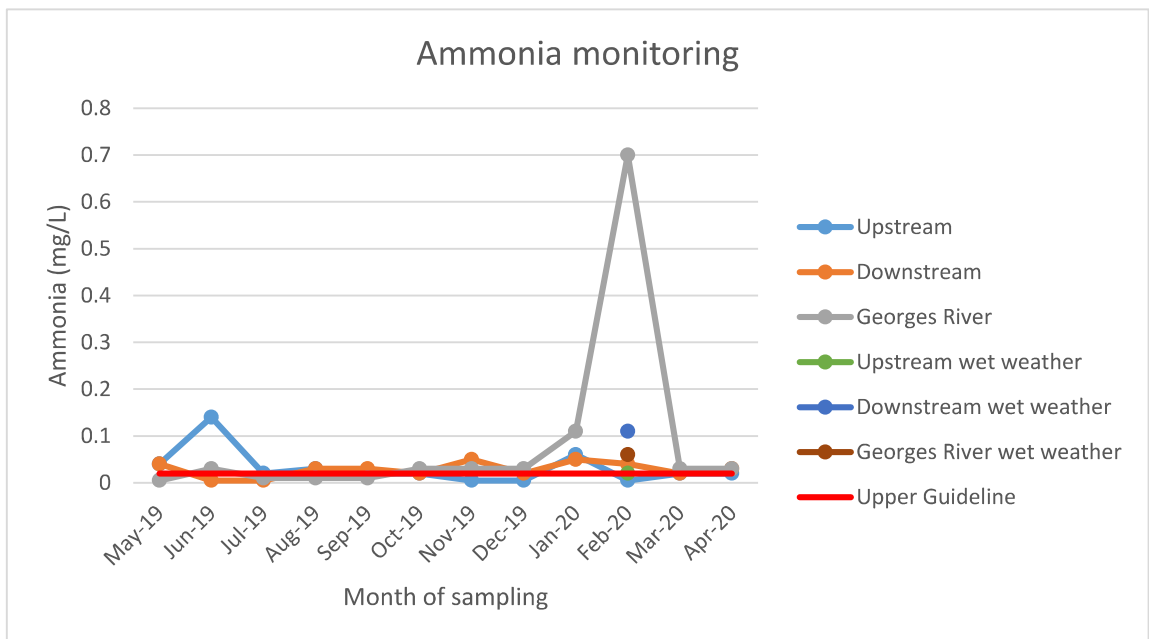

Note: The red line indicates the ANZECC Guideline for lowland rivers (0.02 mg/L)

Figure 3.9 Measured ammonia (mg/L) across sites

Nitrogen Oxides (NOx)

Nitrate [NO₃⁻] and nitrite [NO₂⁻] are related N compounds, which occur naturally in soil, water, plants and food. They are formed when microorganisms break down organic materials, such as plants, animal manure, and sewage. Nitrate is found in chemical fertilizers. Nitrite is used as a preservative and as a curing agent for meat. Nitrate is more commonly found in water than nitrite. The occurrence of high levels of both points to the contamination of water by various sources of N, such as fertilizer and wastewater (in runoff, or leaking septic tanks); manure from livestock, animal wastes (eg fish and birds); and discharges from car exhausts.

Bacteria in water readily convert nitrites to nitrates in an aerobic process called nitrification, which consumes dissolved oxygen. Because of the rapid conversion, nitrites in water are relatively short-lived. In poorly aerated water or water overloaded with organic contamination, low oxygen levels can inhibit nitrification, leaving most of the nitrogen as ammonia or nitrite. Both of these are relatively toxic to organisms.

The major impact of NOx on freshwater is nutrient enrichment, stimulating the growth of phytoplankton, which provides food for higher organisms (invertebrates and fish). An excess of nitrogen often results in over-production of phytoplankton, and as they die and decompose, they use up oxygen, causing oxygen-depletion and death of other oxygen-dependent organisms.


The ANZECC (2000) Freshwater Guideline for NOx is a concentration of 0.04 mg/L for lowland rivers. The summary results for NOx data observed in the sampling are tabulated in Table 3.9 below, and the variation of measured values shown in Figure 3.10.

The ANZECC guideline concentration for NOx was exceeded by 3 of 12 samples for the Upstream site, and 9 of 12 samples for each of the downstream and Georges River sites. When combined with the substantially greater NOx concentrations evident in the mean, median and 80th and 20th percentile concentrations of these latter sites, it appears that they are more frequently affected by nutrient inflows containing NOx than the Upstream site. Such inflows can be expected to occur at the three sites, as shown by the elevated maximum concentrations recorded (0.46 mg/L for Upstream and Georges River, and 0.78 for Downstream), however there are differences in the frequency as described..

Wet weather NOx concentrations were similar to or greater than the dry weather maximum concentrations for each of the sites. This is consistent with increased nutrient mobilisation and transport to the waterway during wet weather.

Table 3.9 Measured NOx (mg/L) concentrations across sites

Site	N	Min	Max	Mean	Median	80 th %ile	20 th %ile	ANZECC upper guideline	#>ANZECC upper guideline	ANZECC lower guideline	#<ANZECC lower guideline	% outside guideline	Wet weather event
Upstream	12	0.005	0.46	0.080	0.01	0.088	0.005	0.04	3	N/A	-	25	0.62
Down-stream	12	0.02	0.78	0.178	0.075	0.276	0.034	0.04	9	N/A	-	75	0.77
Georges River	12	0.005	0.46	0.205	0.225	0.316	0.038	0.04	9	N/A	-	75	0.64

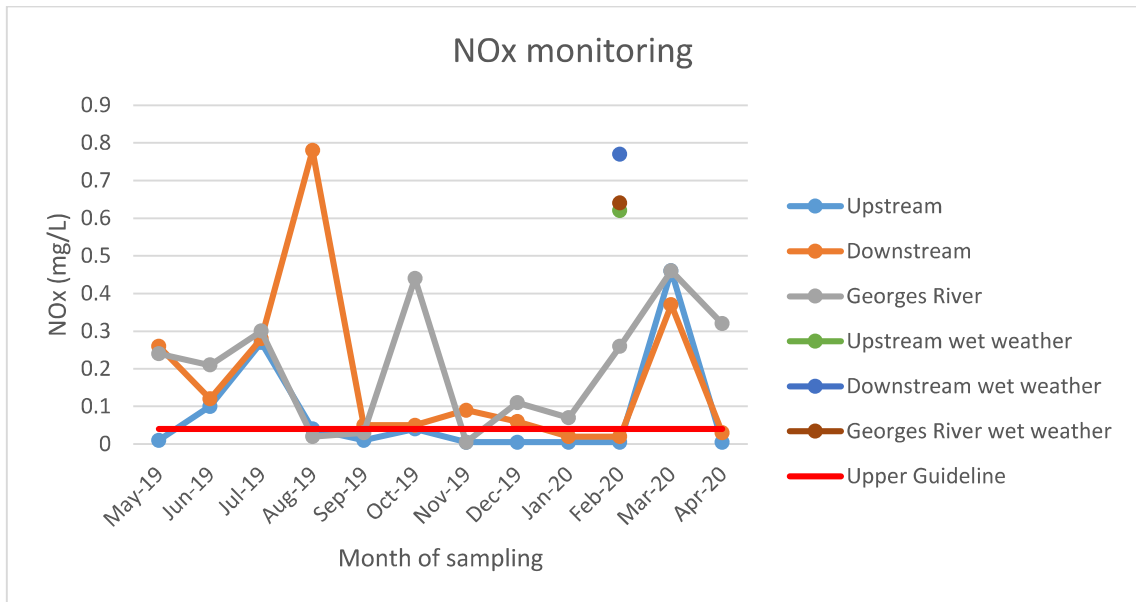

Note: The red line indicates the ANZECC Guideline for NOx in lowland rivers (0.04 mg/L)

Figure 3.10 Measured NOx (mg/L) across the monitored sites

Total Nitrogen (TN)

The ANZECC (2000) Freshwater Guidelines outline a default TN concentration trigger value of 0.35 mg/L for freshwater lakes and reservoirs, and for east flowing coastal rivers in NSW.


The range, mean and median TN concentrations observed in the first six months of sampling rounds are tabulated in Table 3.10 and the variation of measured values shown in Figure 3.11.

The Upstream site infrequently exceeded the ANZECC TN guideline concentration, with 1 of 12 samples greater than 0.5 mg/L TN. The guideline was more frequently exceeded at the Downstream (4 of 12 samples) and Georges River (6 of 12 samples) sites. The TN maxima for all sites ranged between 1.0 and 1.7 mg/L, indicating that all sites can be affected by inflows containing similar TN concentrations. The pattern of the Downstream and Georges River sites more frequently exceeding the guideline threshold was also observed with the NOx monitoring results.

The wet weather concentrations at all sites were similar to the maximum dry weather concentrations.

Table 3.10 Measured TN (mg/L) concentrations across sites

Site	N	Min	Max	Mean	Median	80 th %ile	20 th %ile	ANZECC upper guideline	#>ANZECC upper guideline	ANZECC lower guideline	#<ANZECC lower guideline	% outside guideline	Wet weather event
Upstream	12	0.2	1	0.4	0.3	0.48	0.3	0.5	1	N/A	-	8.3	1.3
Downstream	12	0.2	1.2	0.55	0.4	0.92	0.3	0.5	4	N/A	-	33.3	1.1
Georges River	12	0.1	1.7	0.66	0.55	0.88	0.3	0.5	6	N/A	-	50	1.2

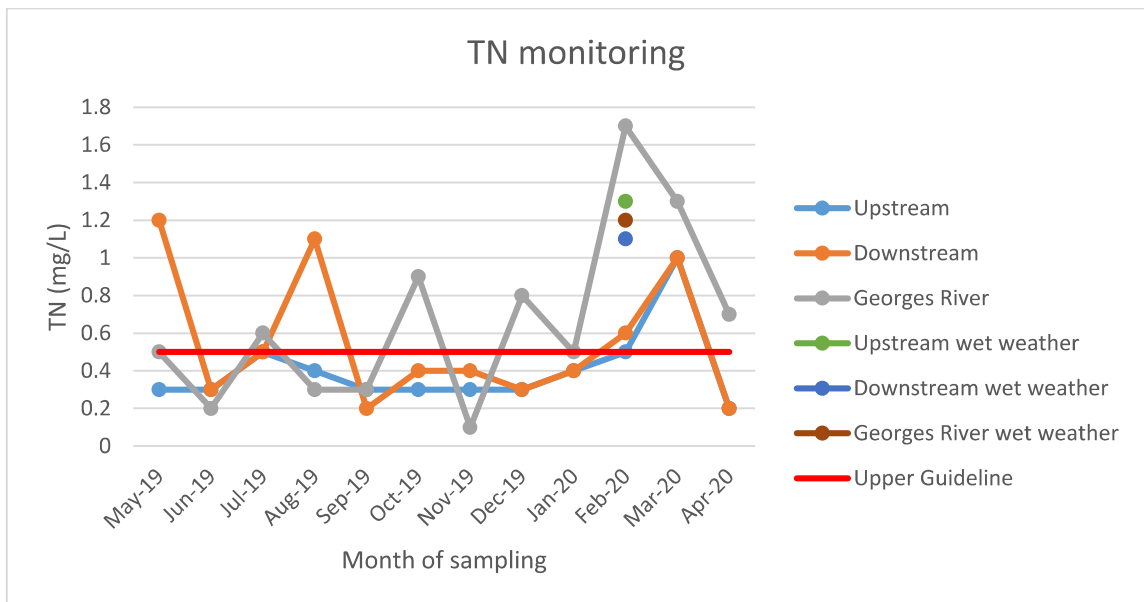

Note: The red line indicates the ANZECC freshwater guideline for TN in lowland rivers (0.5 mg/L)

Figure 3.11 Measured TN (mg/L) across the monitored sites

Phosphorus - Soluble Reactive Phosphorus (SRP) and Total (TP)

Phosphorus is a key element necessary for growth of all plants and animals. Phosphates can exist in three forms: orthophosphate, meta-phosphate (or polyphosphate) and organically bound phosphate. Each compound contains phosphorus in a different chemical formula. Ortho forms are produced by natural processes and are found in sewage. Poly forms are used for treating boiler waters and in detergents. In water, they change into the ortho form. Organic phosphates result from the breakdown of organic pesticides, which contain phosphates. All forms of P may exist in solution, as particles, loose fragments or in the bodies of aquatic organisms.

Rainfall can cause varying amounts of phosphates to wash from farm soils into waterways. Phosphates stimulate the growth of plankton and aquatic plants, which provide food for fish. This may cause an increase in the fish population and improve the overall water quality.

However, under excess concentrations of P, algae and aquatic plants could grow wildly, choke up the waterways and consume large amounts of dissolved oxygen. This condition is known as **eutrophication** or over-fertilization of receiving waters. The excessive growth of aquatic vegetation eventually dies, and as it decays, it uses up oxygen. This process in turn causes the death of aquatic life, because of the lowering of oxygen levels.

Soluble Reactive Phosphorus (SRP)

The ANZECC (2000) Guidelines for the readily-available, soluble P concentrations are 0.005 mg/L for freshwater lakes and reservoirs, and 0.02 mg/L for flowing rivers.

As shown in Table 3.11, the majority of dry weather samples recorded SRP concentrations lower than the ANZECC guideline threshold. Exceedances included 2 of 12 Upstream samples, 0 of 12 Downstream samples, and 4 of 12 Georges River samples. The maximum SRP concentration recorded for the Georges River site (0.16 mg/L) was substantially greater than for the other sites (0.04 mg/L Upstream and 0.02 mg/L Downstream), suggesting that this site may receive inflows containing phosphorus from other inflows, and be more susceptible to subsequent algal growth.

As seen with other nutrients, the wet weather SRP concentrations increased at the Upstream and Downstream sites, and were greater than the dry weather maxima for those sites. For the

Georges River site, the wet weather concentration was greater than the dry weather mean, but less than the dry weather maximum. Table 3.11 and Figure 3.12 below presents the SRP data for surface water, and Figure 3.12 shows the variations of measured values across the sites.

Table 3.11 Measured SRP (mg/L) concentrations across sites*

Site	N	Min	Max	Mean	Median	80 th %ile	20 th %ile	ANZECC upper guideline	#>ANZECC upper guideline	ANZECC lower guideline	#<ANZECC lower guideline	% outside guideline	Wet weather event
Upstream	12	0.005	0.04	0.013	0.01	0.018	0.005	0.02	2	N/A	-	16.7	0.15
Downstream	12	0.005	0.02	0.008	0.005	0.01	0.005	0.02	0	N/A	-	0	0.05
Georges River	12	0.005	0.16	0.028	0.015	0.03	0.005	0.02	4	N/A	-	33.3	0.06

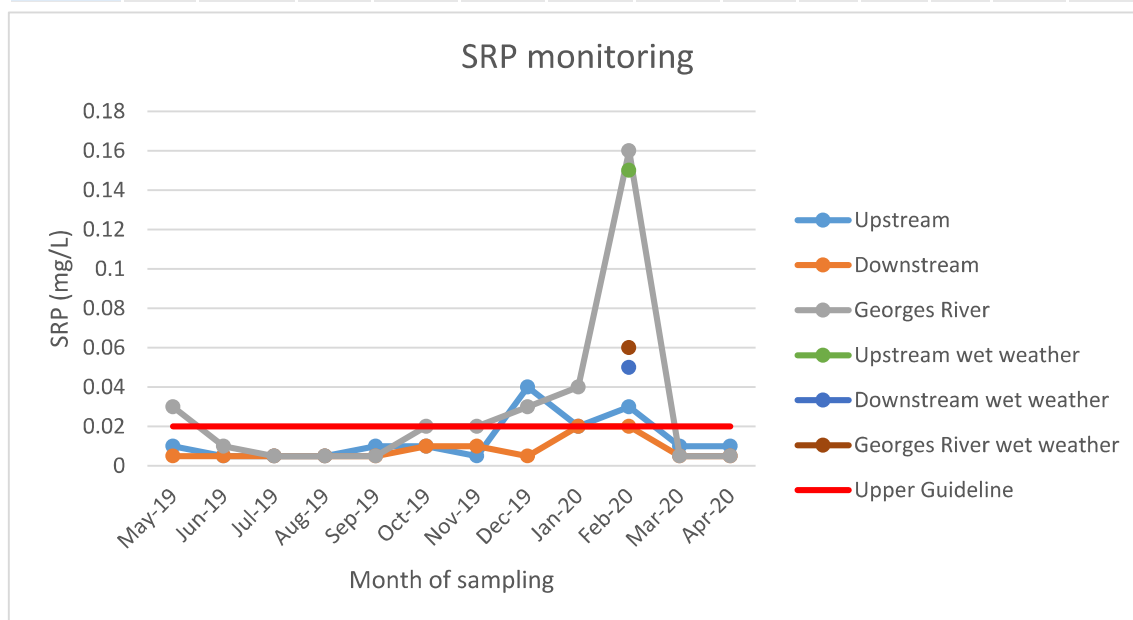


Figure 3.12 Measured SRP (mg/L) across the monitored sites

Total Phosphorus (TP)


The ANZECC (2000) Guidelines for TP concentrations are 0.01 mg/L for freshwater lakes and reservoirs, and 0.05 mg/L for east-flowing rivers. The range, mean and median TP concentrations recorded in the first six months are shown in Table 3.12 below and in Figure 3.13.

The Upstream site recorded 3 of 12 dry weather samples that exceeded the 0.05 mg/L ANZECC guideline, and similarly 4 of 12 samples from the Downstream site exceeded the guideline. These contrasted with 8 of 12 exceedances at the Georges River site. These results indicated a similar pattern to the other nutrient results, with the Georges River site more frequently exceeding guideline thresholds. The maximum TP concentrations recorded at the three sites were similar, and ranged between 0.12 and 0.25 mg/L.

The wet weather TP concentrations for the three sites ranged between 0.14 and 0.3 mg/L, similar to the dry weather maxima.

Table 3.12 Measured TP (mg/L) concentrations across sites

Site	N	Min	Max	Mean	Median	80 th %ile	20 th %ile	ANZECC upper guideline	#>ANZECC upper guideline	ANZECC lower guideline	#<ANZECC lower guideline	% outside guideline	Wet weather event
Upstream	12	0.01	0.12	0.048	0.04	0.066	0.03	0.05	3	N/A	-	25	0.3
Downstream	12	0.005	0.25	0.056	0.025	0.088	0.012	0.05	4	N/A	-	33.3	0.18
Georges River	12	0.02	0.22	0.083	0.065	0.12	0.034	0.05	8	N/A	-	66.7	0.14

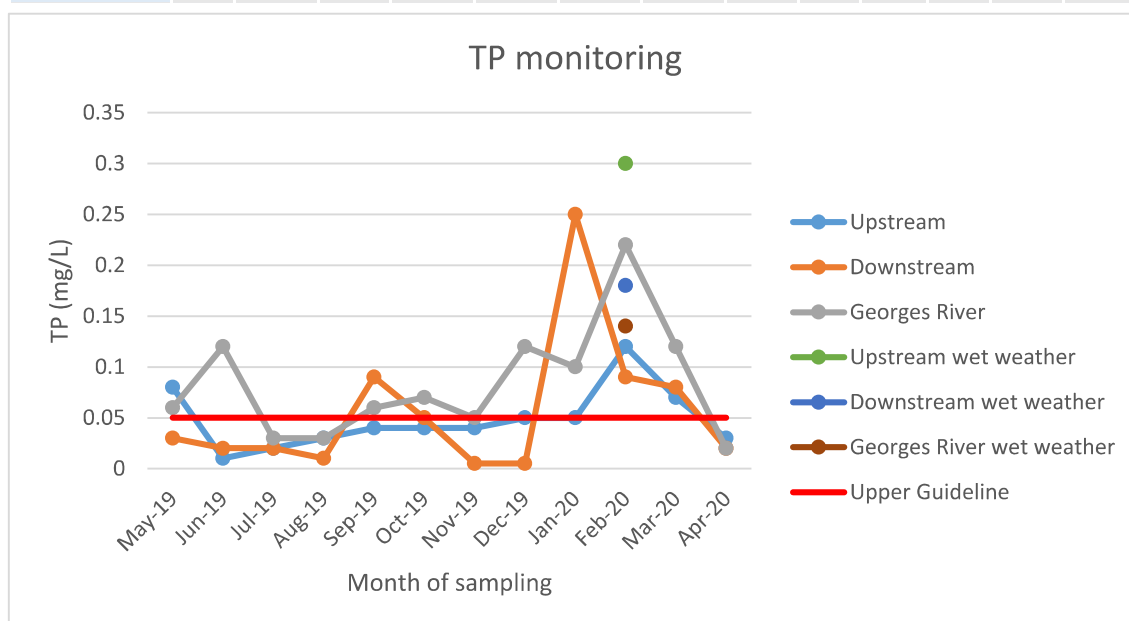

Note: The red lines indicate the ANZECC guidelines for TP in lowland rivers (0.05 mg/L)

Figure 3.13 Measured TP (mg/L) across the monitored sites

3.3 Metals

The samples were examined for a suite of eight metals, the concentrations of which were compared against the NHMRC (2008) and the ANZECC (2000) Guideline values. The thresholds and instances where the detected concentrations exceeded the guidelines are summarised in Table 3.13. With many of the metals concentration results below analytical detection limits, these data have been presented differently to the previous parameters, with description instead of maximum concentrations and the frequency of results exceeding the ANZECC (2000) default guideline concentrations.

Table 3.13 Metals exceedances, all sites, May 2019 to April 2020

Parameter	NHMRC Recreation Guidelines	ANZECC Recreation Guideline	ANZECC Guidelines Freshwater*	Comments
Arsenic (mg/L)	0.07	0.05	0.013	Maximum concentration of 0.002 mg/L recorded in 3 samples (Georges River December 2019, and Upstream and Georges River February 2020). Wet weather maximum concentration 0.001 mg/L.
Cadmium (mg/L)	0.02	0.005	0.0002	Maximum concentration of 0.0002 mg/L recorded in 2 samples (Upstream and Georges River March 2020). Not detected in wet weather samples.
Chromium (mg/L)	0.5	0.05	0.001	Maximum concentration of 0.002 mg/L recorded in 3 samples (Georges River August 2019, Upstream December 2019, and Georges River February 2020). Maximum wet weather concentration 0.002 mg/L, Upstream site.
Copper (mg/L)	20	1	0.0014	Detected at concentrations above ecosystem guideline value in 3 samples Upstream, 5 samples Downstream, and 6 samples Georges River. Maximum concentrations of 0.004 mg/L (Upstream), 0.003 mg/L (Downstream), and 0.005 mg/L (Georges River). Wet weather concentrations of 0.004 mg/L (Upstream and Downstream), and 0.007 mg/L (Georges River).
Lead (mg/L)	0.1	0.05	0.0034	Maximum concentration of 0.002 mg/L recorded in one sample (Georges River December 2019). Maximum wet weather concentration 0.003 mg/L.
Nickel (mg/L)	0.2	0.1	0.011	Maximum concentration of 0.003 mg/L recorded in 6 samples (two each from Upstream, Downstream and Georges River). Not detected in wet weather samples.

Parameter	NHMRC Recreation Guidelines	ANZECC Recreation Guideline	ANZECC Guidelines Freshwater*	Comments
Zinc (mg/L)	30	5	0.008	Detected at concentrations above ecosystem guideline value in 7 samples Upstream, 11 samples Downstream, and 3 samples Georges River. Maximum concentrations of 0.05 mg/L (Upstream) and 0.053 mg/L (Downstream) during January 2020 were substantially greater than other recorded results. Wet weather concentrations of 0.026 mg/L (Upstream), 0.03 mg/L (Downstream), and 0.023 mg/L (Georges River).
Mercury (mg/L)	0.01	0.001	0.0006	Not detected at any of the sites during dry or wet weather sampling (LOR 0.0001 mg/L).

* For 95% species protection in South-East Australian waterways.

The following observations about the metals results to-date can be made:

- Cadmium, Lead and Nickel were not detected at concentrations greater than the ANZECC ecosystem protection guidelines during dry weather sampling.
- Arsenic and Chromium were infrequently detected at concentrations slightly greater than the ANZECC ecosystem protection guidelines at the Upstream and Georges River sites.
- Copper was infrequently detected at concentrations slightly greater than the ANZECC ecosystem protection guidelines at the three sites.
- Zinc was frequently detected at concentrations slightly greater than the ANZECC ecosystem protection guidelines at the Upstream and Downstream sites, and infrequently at the Georges River site. The Upstream and Downstream sites both recorded greater zinc concentrations (~0.05 mg/L) in the January 2020 samples.

These data indicate that, under pre-construction conditions and inflows, the concentrations of some metals can sometimes be expected to exceed guideline concentrations at the three monitored sites. In particular, Zinc concentrations can be expected to regularly exceed the ANZECC guideline threshold at the Upstream and Downstream sites, in the absence of construction activities.

3.4 Other urban pollutants

Testing for a range of other analytical parameters was performed for all samples, including organochlorine (OC) and organophosphate (OP) pesticides, PAH and phenolic substances, semi-volatile total recoverable hydrocarbons (TRH), and volatile TRM including BTEXN (benzene, toluene, ethylbenzene, xylene and naphthalene). The results for these analyses were negative (below the limit of reporting) for all samples, including dry and wet weather monitoring.

3.5 Wet weather event monitoring

One wet weather event was sampled during the reporting period; on 7 February 2020. Commentary about the wet weather data has been included with each of the analytical parameters, and is summarised as follows:

- Of the monitored physico-chemical parameters, pH was not noticeably affected by wet weather, EC was reduced, and turbidity and TSS were increased. These changes can be attributed to the dilution of salinity and the effect of stormwater inflows containing suspended material on the waterway.
- Enterococci concentrations were greatly increased following wet weather. This can be attributed to stormwater inflows mobilising and transporting faecal material to the waterway (ie Sewage overflows).
- For nutrients, wet weather ammonia concentrations were similar to dry weather median data, whilst for other nutrients the wet weather concentrations were similar to dry weather maxima.
- Of the monitored metals; cadmium, nickel and mercury were not detected in wet weather samples. The other metals were similar to dry weather concentrations.
- The other tested contaminants (pesticides and hydrocarbons) were not detected in dry or wet weather sampling.

3.6 Summary of surface water quality sites

A summary of the water quality obtained from the surface water monitoring is presented in Table 3.14. These data indicate that:

- pH was almost always within the ANZECC guideline range, with one Upstream sample outside of the range.
- EC was almost always within the ANZECC guideline range, with the exception of the Georges River site, which has marine influences.
- Turbidity was sometimes greater than the ANZECC guideline threshold, more frequently at the Downstream and Georges River sites than the Upstream site.
- TSS was always less than the adopted guideline threshold.
- Enterococci concentrations were frequently above the secondary contact recreation threshold at the Upstream site, and progressively less frequently above this threshold at the Downstream and Georges River sites. E. coli concentrations were not compared here due to the increased die-off of this organism under saline conditions.
- Nutrient concentrations were frequently above the ANZECC guideline thresholds at the Downstream and Georges River sites, and less frequently elevated at the upstream site.
- Seasonal variations were generally not observed, during the wet weather event sampled, increases in faecal material was noted in the analysis.

Table 3.14 Summary of water quality data (May 2019 – April 2020) – exceedance of default ANZECC guideline values (% of samples)

Site	pH	EC	Turbidity	TSS	Enterococci	Ammonia	NOx	TN	SRP	TP
Upstream	8.3	0	33.3	0	75.0	33.3	25	8.3	16.7	25
Downstream	0	8.3	66.7	0	33.3	58.3	75	33.3	0	33.3
Georges River	0	83.3	58.3	0	8.3	66.7	75	50	33.3	66.7

Note: Results are summarised from the values presented in the previous tables in this report, of the percentage of results outside of guideline ranges.

The following observations summarise the water quality characteristics of the monitored sites:

3.6.1 Upstream

- Small amount of tidal influence on EC.
- Some effects of turbid inflows.
- Enterococci concentrations usually above the secondary contact recreational guideline, indicating ongoing effect from faecal contamination during dry weather.
- A substantial increase in enterococci concentrations during wet weather.
- Nutrient concentrations sometimes above ANZECC guidelines, although less frequently than observed at the other monitored sites.
- Some metals infrequently recorded above ANZECC ecological guidelines (As, Cr, Cu). Zn was frequently recorded above ANZECC guidelines.
- No pesticides or hydrocarbons detected.

3.6.2 Downstream

- More elevated EC than Upstream, attributed to tidal effects.
- Turbidity more frequently elevated than Upstream.
- Enterococci concentrations sometimes above the secondary contact recreational guideline, indicating some effect from faecal contamination during dry weather.
- A substantial increase in enterococci concentrations during wet weather.
- Nutrient concentrations frequently above ANZECC guidelines, particularly the nitrogenous nutrients.
- Some metals infrequently recorded above ANZECC ecological guidelines (Cu). Zn was frequently recorded above ANZECC guidelines.
- No pesticides or hydrocarbons detected.

3.6.3 Georges River

- More elevated EC than the other sites, attributed to tidal effects.
- Turbidity more frequently elevated than Upstream.
- Enterococci concentrations infrequently above the secondary contact recreational guideline, indicating some effect from faecal contamination during dry weather.
- A substantial increase in enterococci concentrations during wet weather.
- Nutrient concentrations frequently above ANZECC guidelines.

- Some metals infrequently recorded above ANZECC ecological guidelines (As, Cr, Cu, Zn).
- No pesticides or hydrocarbons detected.

3.7 Long term data comparison

Some long term monitoring data are available for this area. The GRCCC has generously shared their monitoring data for two sites on Cabramatta Creek (Cabramatta Creek Upper and Cabramatta Creek Lower), so as to allow a comparison of the described project data with a dataset gathered over a longer period. The Upper Cabramatta Creek sampling location is near 94 Bugong Road, Prestons well upstream of the project site. The Lower Cabramatta Creek sampling location is at the same location adjacent to Broomfield St as this project has noted as the 'downstream' sampling location. The GRCCC dataset includes other parameters that have not been summarised here. The dataset is comprised of samples taken between 1 November 2009 and 31 March 2020. Non-numeric data have been treated the same way as in the earlier data analysis (ie $<x = x/2$).

The GRCCC data have been summarised in Table 3.15 and Table 3.16. From a brief and non-systematic comparison, the datasets appear to be relatively similar. The concentrations of TN and TP in the 11-year dataset are more elevated than those recorded in the recent sampling, this may be due to different rainfall patterns and/or changes in catchment land use between the two study periods.

Table 3.15 GRCCC Cabramatta Creek Upper – data summary

Parameter	N	Min	Max	Mean	Median	80 th %ile	20 th %ile
pH (units)	17	5.98	8.11	7.09	7.15	7.39	6.84
EC (µS/cm)	19	542	3770	1582	1087.4	2470	950.8
Turbidity (NTU)	18	3.4	216	41.38	20.85	52.34	7.84
TSS (mg/L)	4	2.5	126	35	5.75	55.8	2.5
Enterococci	0	-	-	-	-	-	-
Ammonia (mg/L)	13	0.04	1	0.3	0.25	0.46	0.08
NOx (mg/L)	16	0.0025	0.34	0.1	0.04	0.23	0.01
TN (mg/L)	19	0.6	2.9	1.36	1.2	1.74	0.98
SRP (mg/L)	10	0.01	0.14	0.049	0.024	0.083	0.018
TP (mg/L)	19	0.03	0.8	0.25	0.18	0.34	0.12

Table 3.16 GRCCC Cabramatta Creek Lower – data summary

Parameter	N	Min	Max	Mean	Median	80 th %ile	20 th %ile
pH (units)	29	6.07	8.19	7.28	7.37	7.532	7.02
EC (µS/cm)	31	434	2800	1108	971	1625	559
Turbidity (NTU)	31	0	114	14.5	9.3	16.5	4.2
TSS (mg/L)	4	2.5	15	5.6	2.5	7.5	2.5
Enterococci	0	-	-	-	-	-	-
Ammonia (mg/L)	14	0.0025	0.06	0.02	0.02	0.024	0.0092
NOx (mg/L)	30	0.005	0.38	0.102	0.065	0.16	0.02
TN (mg/L)	31	0.2	6.9	0.76	0.55	0.8	0.4
SRP (mg/L)	10	0.004	0.027	0.014	0.012	0.023	0.005
TP (mg/L)	30	0.005	0.94	0.08	0.05	0.08	0.03

4. Discussion and recommendations

4.1 General observations

This reports builds on the data and information provided by Technical Report 7 – Surface Water and Groundwater Quality Impact Assessment. This describes, in detail, the existing environmental conditions in the project area, with regard to surface water.

The intention of the monitoring program seeks to establish baseline surface water quality conditions for the project area. Establishing this will enable the achievement of Level 2 of the credit Env-1 from the Infrastructure Sustainability Rating Scheme v2.0 by establishing pre-construction baseline surface water quality data which will subsequently be compared to construction and operational monitoring data. The available twelve month baseline monitoring period was defined by ARTC prior to the potential start of construction activities. Site specific guideline levels have been defined based on the existing conditions of the sites as measured by the baseline water quality monitoring program. These values are presented in section 3.2 and will be used to confirm whether the proposed water quality controls and management measures during and following construction will meet the water quality objectives (ARTC, 2019).

Whilst the overall amount of rainfall was similar to the long term average, the distribution of rainfall was different. Rainfall was extremely light throughout most of the reporting period, with the exception of two wet weather events in September 2019 and February 2020. Eight of the twelve months in the period were drier than the corresponding long-term median. Most of the rainfall recorded fell during the February 2020 event; 328 millimetres fell between 7 and 10 February, and 160 millimetres was recorded on 10 February alone. As described, one wet weather sampling event was performed in February 2020. Additional wet weather sampling would have been preferable to better establish wet weather water quality conditions, however such sampling is of course weather-dependent, and was not able to be performed in the monitoring timeframe.

Two notable characteristics of all of the sites are elevated enterococci levels, and nutrient enrichment, which are both closely related to land use. Elevated enterococci levels are indicative of potential faecal contamination from sources such as sewage overflows, urban runoff and agricultural inputs within the catchment draining to the creek (typical of a catchment of this nature). These were noted to greatly increase during sampling of the wet weather event on 7 February 2020. The enterococci levels found during sampling are infrequently above the recreational guideline value for secondary contact.

Nutrient enrichment of both standing pools and flowing waterways is common, indicated particularly by highly elevated concentrations of TP, TN, NO_x and ammonia. Runoff of these nutrients can be expected from landscaped parks and recreational areas along with golf courses that may use nutrient rich fertilisers for lawns in these areas.

Some metals were detected infrequently at most sites, with only copper and zinc being more frequently recorded at concentrations greater than ANZECC ecosystem protection guidelines.

Hydrocarbons were not detected at the surface water sites. Of the other monitored potential pollutants, including OC/OP pesticides, PAHs, and phenolic substances, the analyses were negative for all samples, including dry and wet weather monitoring.

A brief and non-systematic comparison with the GRCCC long term water quality dataset 2009-2020 found that more elevated TN and TP concentrations have been recorded in Cabramatta Creek in the last 11 years, compared with what was recorded in the 12 month dataset for this project. This observation may be linked to differences in rainfall patterns between those time periods, and/or changes in land use in the creek catchment area. More detailed examination of

the longer term dataset may be warranted if concentrations of water quality parameters during construction monitoring deviate significantly from those recorded in the pre-construction phase. This is to be determined whether necessary by ARTC during further phases of the proposed assets life cycle.

4.1.1 Rain events

Water quality monitoring was performed after a single rain event, following heavy rainfall on 7 February 2020. The results of the wet weather monitoring included:

- Decreased EC at the sites.
- Markedly increased turbidity and TSS for the wet weather event at the sites.
- Increased enterococci concentrations at most sites, this can be attributed to stormwater inflows mobilising and transporting faecal material to the waterway.
- For nutrients, wet weather ammonia concentrations were similar to dry weather median data, whilst for other nutrients the wet weather concentrations were similar to dry weather maxima.
- Of the monitored metals, cadmium, nickel and mercury were not detected in wet weather samples. The other metals were similar to dry weather concentrations.
- The other tested contaminants (pesticides and hydrocarbons) were not detected in dry or wet weather sampling.

These results are as expected in wet weather flows through areas where urbanisation through the catchment has occurred, as it has in much of the Cabramatta Creek catchment.

4.2 Summary and recommendations

The sampling and monitoring shall be undertaken as determined by ARTC, to allow the collection of data during the construction and operational phases that can be compared against the baseline data. Implementation of the monitoring program has enabled the collection of surface water quality data of the selected sites. Sampling was performed mostly under dry weather conditions, as well as the monitored rain event.

It is recommended that if sampling sites need to be moved, that this can occur in advance of access becoming restricted, and that it is to be described and considered in any subsequent reporting. Restricted access may occur as future construction progresses (namely around the sampling location downstream of the project site).

It is recommended that if potential water quality effects on the sites from nearby construction become known, that these are described and considered in subsequent reporting. Details of monitoring requirements of water discharge and receiving water quality is recommended to be included in relevant management plans for construction and operation.

5. References

ANZECC (2000) Australian and New Zealand guidelines for fresh and marine water quality. National Water Quality Management Strategy, Australian and New Zealand Environment and Conservation Council and Agriculture and Resource Management Council of Australia and New Zealand, Canberra.

Australian Rail Track Corporation (2019), *Cabramatta Rail Loop Environmental Impact Statement: Technical Report 7 – Surface Water and Groundwater Quality Impact Assessment*.

Bewsher Consulting Pty Ltd(2004), *Georges River Floodplain Risk Management Study and Plan*, Georges River Floodplain Management Committee.

BOM (2018), Long-term Rainfall Data for Bankstown Aerodrome station 13667, Bureau of Meteorology.

http://www.bom.gov.au/jsp/ncc/cdio/weatherData/av?p_nccObsCode=136&p_display_type=dailyDataFile&p_startYear=&p_c=&p_stn_num=066137.

Georges Riverkeeper (2020), Interactive map of the Georges River.
<https://georgesriver.org.au/learn-about-the-river/georges-river-map>.

Georges River Combined Councils Committee Incorporated, 2018, *2016-2017 River Health Georges River Report Card*. NHMRC (2008). National Health & Medical Research Council. Guidelines for managing risk in recreational waters. Australian Government Publication.

NSW EPA (2004), *Approved Methods for the Sampling and Analysis of Water Pollutants in New South Wales*. Department of Environment and Conservation (NSW).